
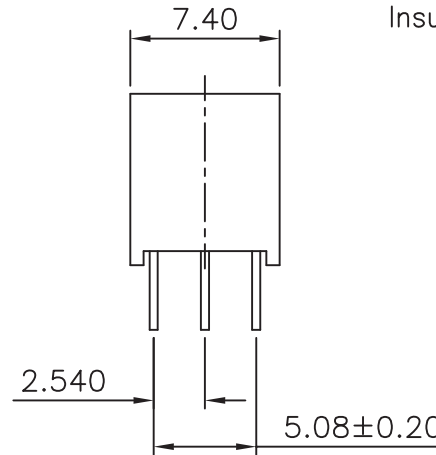


Specifications


Current Rating: 3Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 600V AC/DC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials

Contact Material: Phosphor Bronze
 Insulation Material: Polyester, UL 94V-0 P.B.T

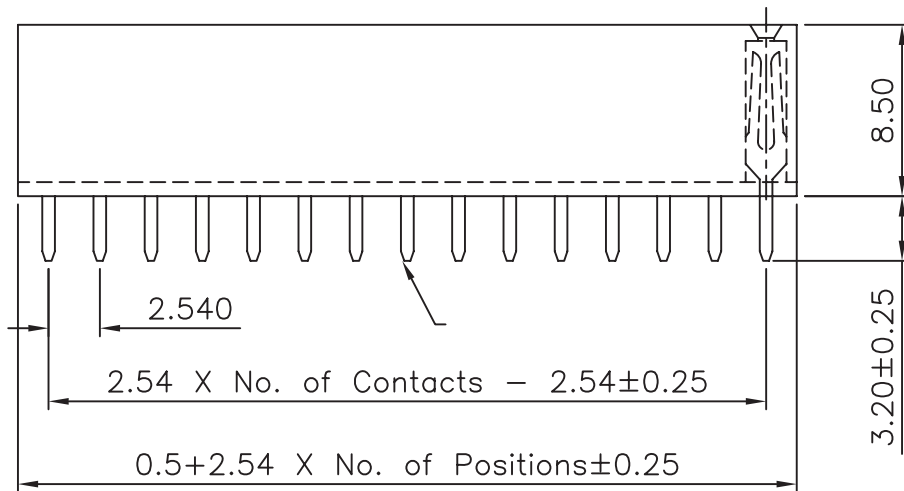

Recommended P.C.Board
 Hole Layout

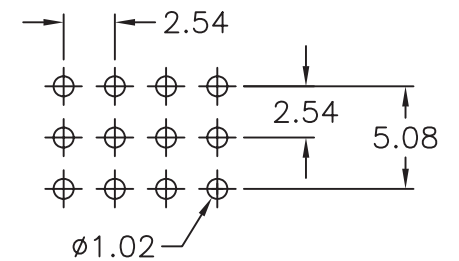

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT/mm


SCALE 1:1

DATE


SIZE A4

P PROJECTION

X. ±
 .X ± 0.38
 .XX ± 0.25
 .XXX ± 0.13
 ANG ±



ORDER INFORMATION

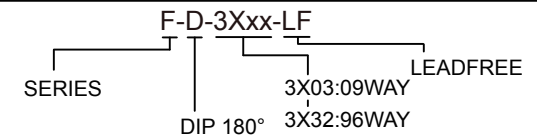

DESCRIPTION: 2.54 FEMALE HEADER TRIPLE ROWS DIP TYPE BASE 8.50H