
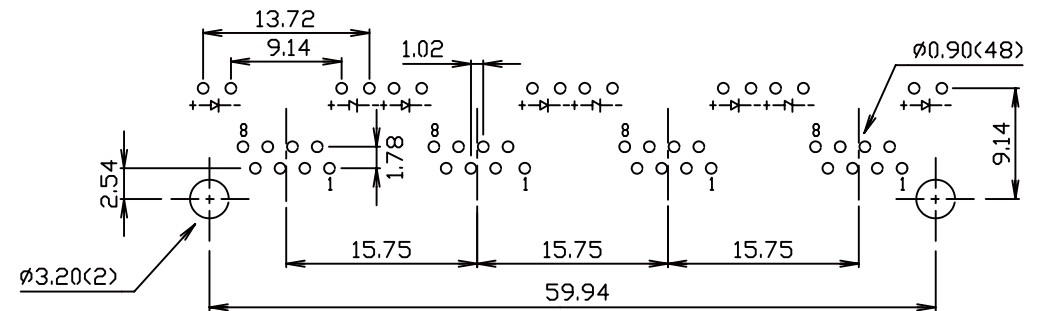
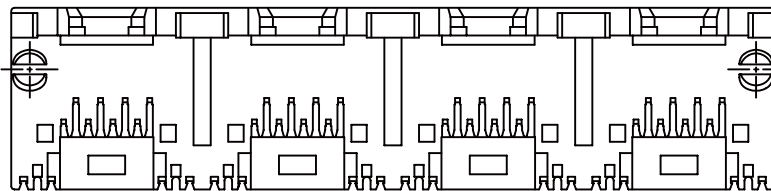
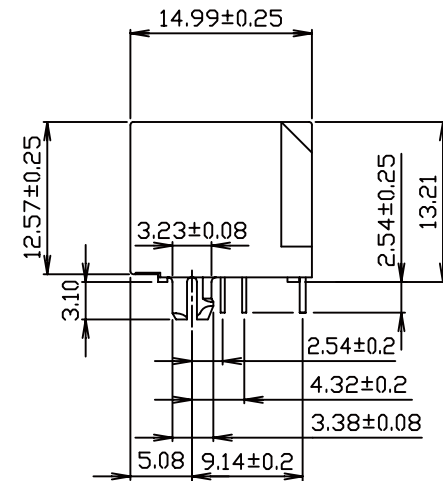


MATERIAL:

- HOUSING-DSM STANYL TE250F6 (NYLON-46)
HEAT DEFLECTION TEMP.290°
BLACK COLOR, UL94V-0
- CONTACTS-0.35mm THICK PHOS-BRONZE PLATED
WITH HARD GOLD AND GOLDF FLASH IN
SOLDER AREA.

CAVITY CONFIRMS TO FCC RULES AND REGULATIONS
PART 68,SUBPART F.

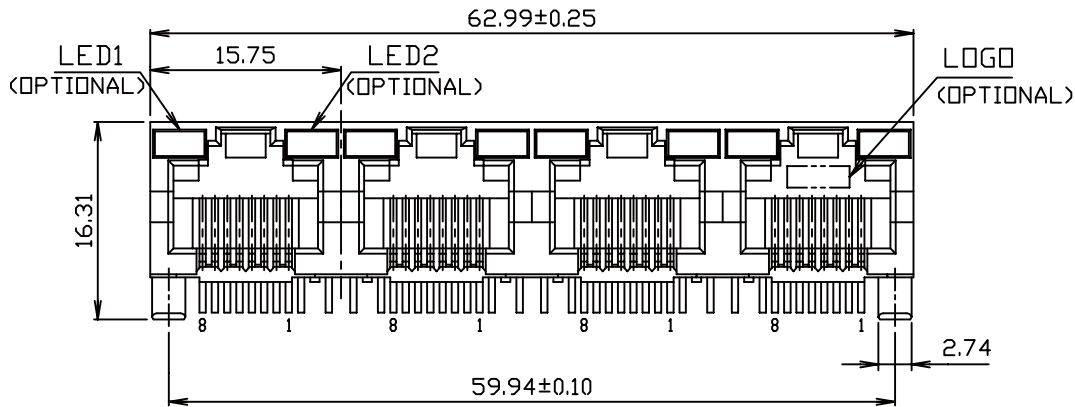

PCB LAYOUT
Ref.

RoHS Compliant

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT/mm SCALE 1:1


DATE

SIZE A4


TOLERANCES ARE

- X.±
- .X±
- .XX±
- .XXX±
- ANG±

PJECTION



ORDER INFORMATION

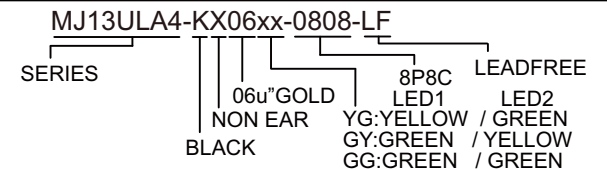

DESCRIPTION: 4PORTS, WITH LED'S, SHIELDED
SIDE ENTRY PCB GANGED JACK