

MATERIAL

Insulator : 30% Glass fiber PBT

Contact Pin : Brass

SPECIFICATION




Current Rate : 3 AMP

Insulation Resistance : 5000M Ω Min. at DC 500V

Contact Resistance : 20m Ω Max. at DC 100mA

Dielectric Voltage : AC 500V for one minute

Operation Temperature : -40°C to + 105°C

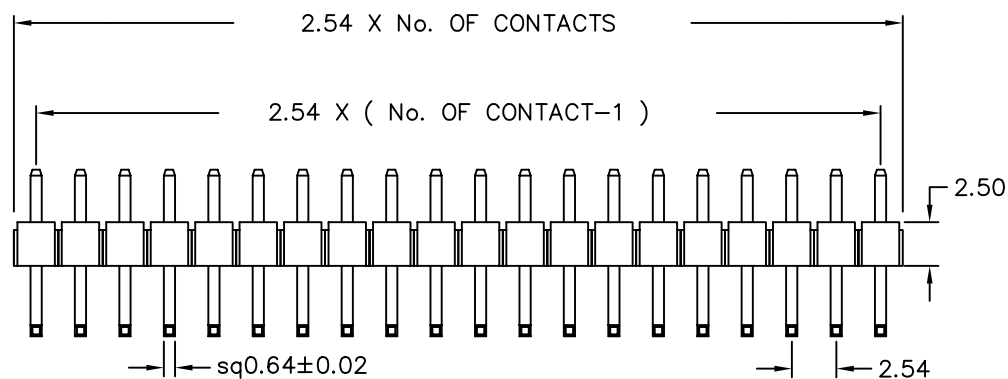

Recommended P.C.B Layout

MORETHANALL
CONNECTORS
ASSEMBLIES

煜倫有限公司

PART NO. H-R-1Xxx

DWG NO. H-R-1Xxx

FILE NO. PH1R0-1XXGB 30/60/62

UNIT / mm

SCALE 1:1

APPROVED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.3

.XX ± 0.2

.XXX

AWG

DESCRIP TION:

AREA

PIN HEADER 2.54*2.54mm
RIGHT ANGLE TYPE, SINGLE ROW
OPPOSITE INSULATOR

REVISIONS

HK

DATE