
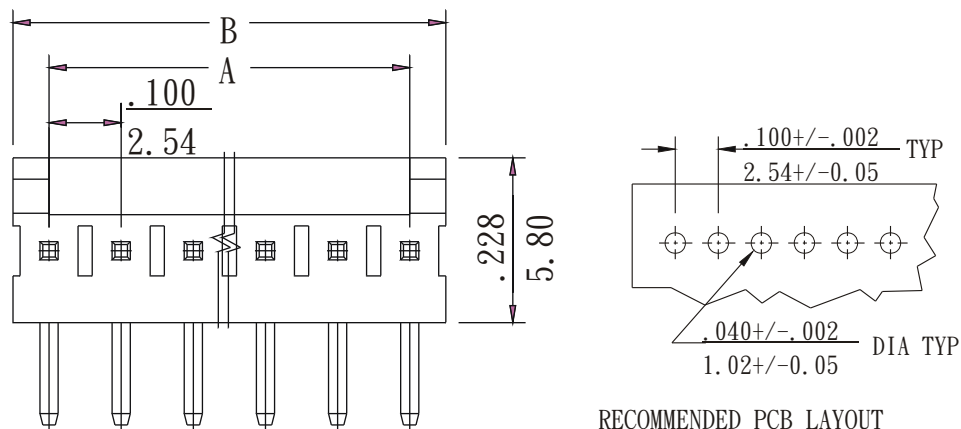


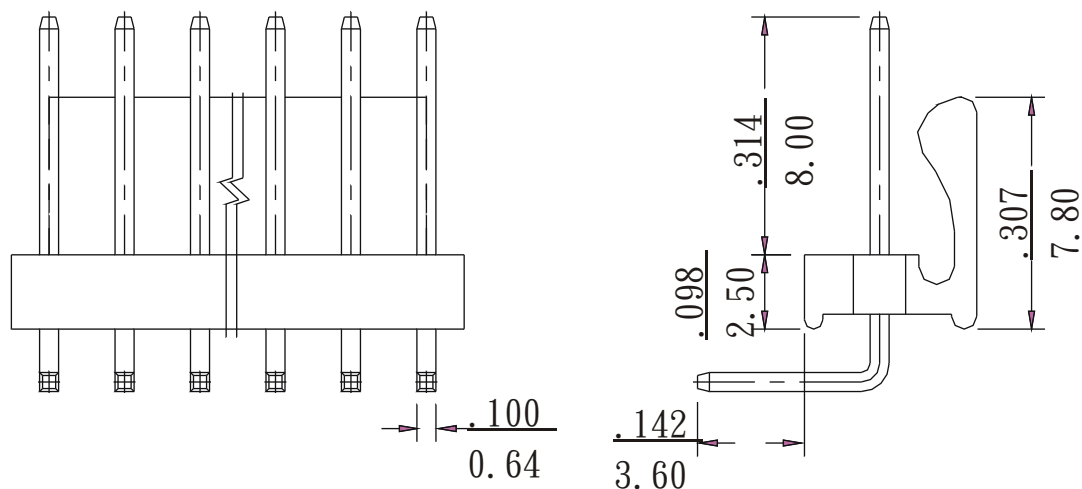

- * Material: Nylon UL 94V-2
- * Contact: Copper alloy 0.64 mm square pin,
Tin-plated or gold-flash
- * Current rating : 2A, AC/DC
- * Voltage rating : 250V, AC/DC
- * 2-28 circuits available

Dimensional information-inch/mm

Circuits	Dim. A		Dim. B		Circuits	Dim. A		Dim. B	
	inch	mm	inch	mm		inch	mm	inch	mm
2	0.100	2.54	0.200	5.08	16	1.500	38.10	1.600	40.64
3	0.200	5.08	0.300	7.62	17	1.600	40.64	1.700	43.18
4	0.300	7.62	0.400	10.16	18	1.700	43.18	1.800	45.72
5	0.400	10.16	0.500	12.70	19	1.800	45.72	1.900	48.26
6	0.500	12.70	0.600	15.24	20	1.900	48.26	2.000	50.80
7	0.600	15.24	0.700	17.78	21	2.000	50.80	2.100	53.34
8	0.700	17.78	0.800	20.32	22	2.100	53.34	2.200	55.88
9	0.800	20.32	0.900	22.86	23	2.200	55.88	2.300	58.42
10	0.900	22.86	1.000	25.40	24	2.300	58.42	2.400	60.96
11	1.000	25.40	1.100	27.94	25	2.400	60.96	2.500	63.50
12	1.100	27.94	1.200	30.48	26	2.500	63.50	2.600	66.04
13	1.200	30.48	1.300	33.02	27	2.600	66.04	2.700	68.58
14	1.300	33.02	1.400	35.56	28	2.700	68.58	2.800	71.12
15	1.400	35.56	1.500	38.10					

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

MT-R-xx-LF
SERIES T LEADFREE
02~28WAY
DIP 90°

DESCRIPTION: MT Series Right Angle Headers