


P.C.B LAYOUT




SPECIFICATIONS

Current Rating: 9A AC,DC  
 Voltage Rating: 600V AC,DC  
 Temperature Range: -25°C ~ +85°C  
 Contact Resistance: 10mΩ Max  
 Insulation Resistance: 1000MΩ Min  
 Withstanding Voltage: 1500V AC/minute  
 Pin Material: Brass/Tin-plated  
 Material: Nylon 66,UL94V-2  
 Color: Natural(Translucent)

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
<b>MF-PRP-1X02</b>	4.20	9.60
<b>MF-PRP-1X03</b>	8.40	13.80
<b>MF-PRP-1X04</b>	12.60	18.00
<b>MF-PRP-1X05</b>	16.80	22.20

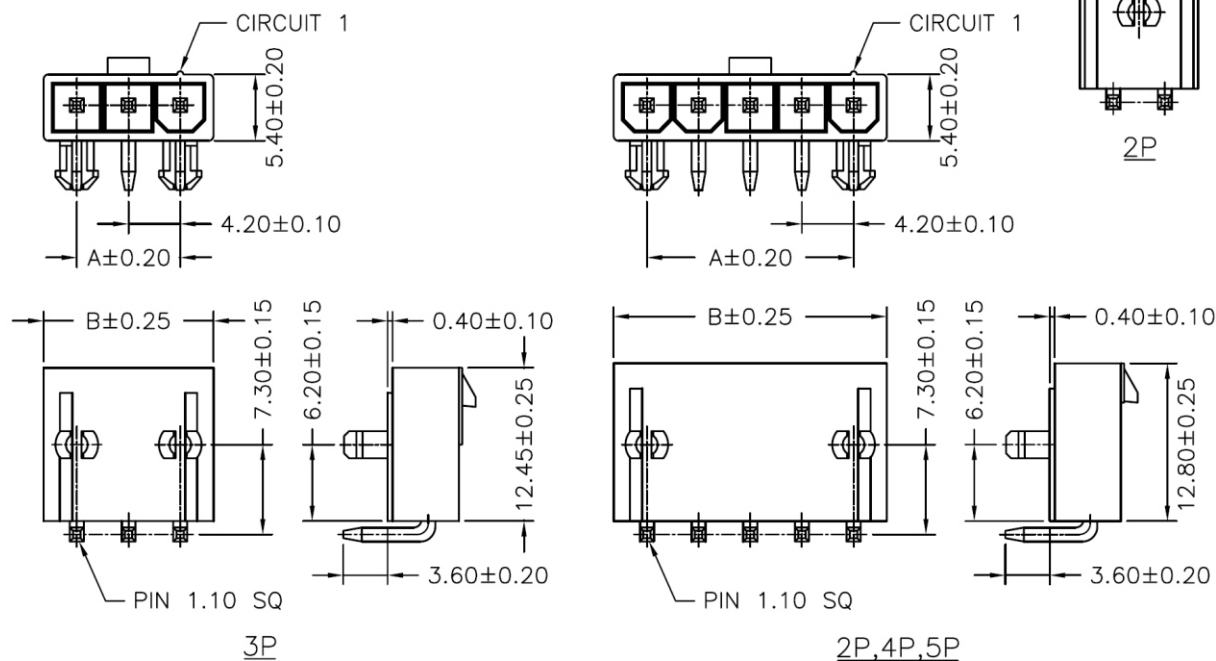

**MF-PRP-1Xxx-LF**  
 LEADFREE

**RoHS Compliant**



煜倫股份有限公司

PART NO. <b>MF-PRP-1Xxx</b>		CHECKED BY CY		TOLERANCES ARE .X±0.2 .XX± .XXX± AWG	DESCRIP TION:	AREA	REVISIONS	HK	DATE
DWG NO. <b>MF-PRP-1Xxx</b>		DRAWING BY							
FILE NO.		PROJECTION							
UNIT / mm	SCALE 1:1								