

NOTES:

- Housing: Thermoplastics,UL94V-0
- Contact: Copper Alloy
- Shell: Copper Alloy/Steel
- Voltage Current Rating:1.5 AMP. 30V AC
- Insulation Resistance:1000M Ω Min.
- Contact Resistance: 30 M Ω Max.
- Dielectric Withstanding Voltage:500V AC
- Temperature Range: -35°C to +85°C
- Insulator color: Black/White
- Plastic material: PBT/LCP/Others
- Shell finish: Nickel plated/Tin-Lead plated
- Mechanical:
- Mating Force: 3.5KG MAX
- Unmating Force: 1.0 KG MIN.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X. \pm 0.30

CHECKED BY GENIUS

.X \pm 0.25

UNIT / mm

SCALE 1 : 1

.XX \pm 0.20


.XXX \pm 0.10

DATE


ANG \pm

SIZE A4

P PROJECTION



ORDER INFORMATION

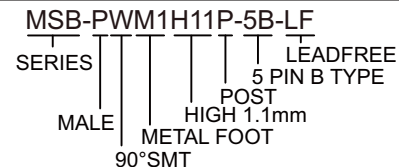

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: MINI USB 5P 公 端子SMT 鐵殼DIP 有柱