

1 2 3 4 5 6 7 8 9 0


J
I
H
G
F
E
D
C
B
A

Features:

- * Available in 2 through 15 circuits
- * Nylon 66 UL94V-0
- * Tolerance ± 0.2

Specification :

- * Pitch between poles 2.0mm
- * Rated Voltage 250V AC,DC
- * Rated Current 2A
- * Withstand Voltage 800V AC/minute
- * Insulation Resistance 1,000M Ω /min
- * Temperature Range -25~+85 °C

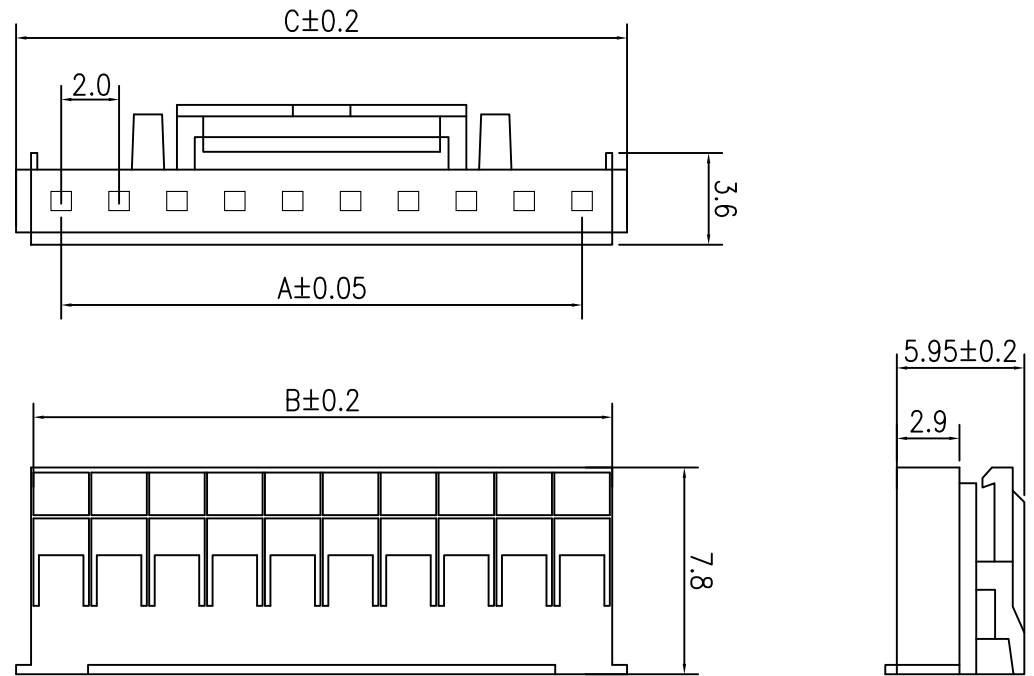

Circuits	Part	Dimension mm		
		A	B	
2	YH20-H-02	2.0	4.6	5.6
3	YH20-H-03	4.0	6.6	7.6
4	YH20-H-04	6.0	8.6	9.6
5	YH20-H-05	8.0	10.6	11.6
6	YH20-H-06	10.0	12.6	13.6
7	YH20-H-07	12.0	14.6	15.6
8	YH20-H-08	14.0	16.6	17.6
9	YH20-H-09	16.0	18.6	19.6
10	YH20-H-10	18.0	20.6	21.6
11	YH20-H-11	20.0	22.6	23.6
12	YH20-H-12	22.0	24.6	25.6
13	YH20-H-13	24.0	26.6	27.6
14	YH20-H-14	26.0	28.6	29.6
15	YH20-H-15	28.0	30.6	31.6



煜倫有限公司

PART NO. YH20-H-xx

DWG NO. YH20-H-xx

FILE NO.

UNIT / mm

SCALE 1:1

APPROVED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE
.X
.XX
.XXX
AWG

DESCRIP TION:			
AREA	REVISIONS	HK	DATE