



RECOMMEND P.C.B LAYOUT

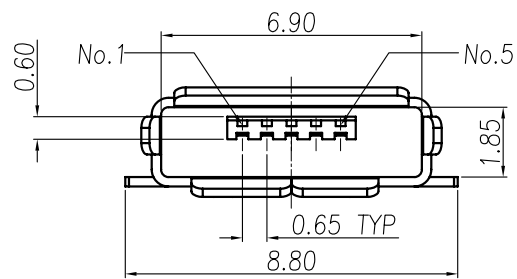


NOTE:

1.ELECTRICAL PROPERTIES:

- 1-1.CONTACT CURRENT RATING:1.8A(ONLY PIN1,5) AT THE SAME TIME  
0.5A AT CONTACT PIN 2,3,4 OTHER 1A(ONLY PIN2,3 4).
- 1-2.CONTACT RESISTANCE:30m Ohm MAX
- 1-3.INSULATION RESISTANCE:100M Ohm MIN AT DC 500V.
- 1-4.DIELECTRIC WITHSTANDING VOLTAGE:AC 100V AC/1 MINUTE 10mA.

2.MATERIAL:

- 2-1.PIN:PHOSPHOR BRONZE.
- 2-2.HOUSING:LCP.
- △ 2-3.SHELL:STAINESS #304.

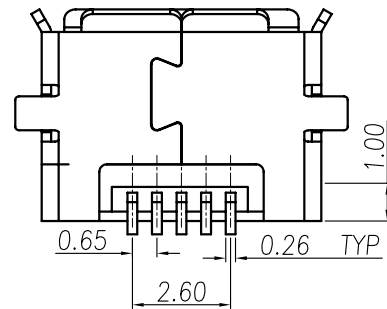

MISB-SW-5AB-LF  
LEADFREE

RoHS Compliant

**MORETHANALL**  
CONNECTORS  
ASSEMBLIES

PART NO. MISB-SW-5AB

DWG NO. MISB-SW-5AB

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.2  
.XX ±  
XXX ±  
AWG

DESCRIPTION:

MICRO USB 5P(F) AB TYPE

AREA

REVISIONS

HK

DATE

煜倫股份有限公司