

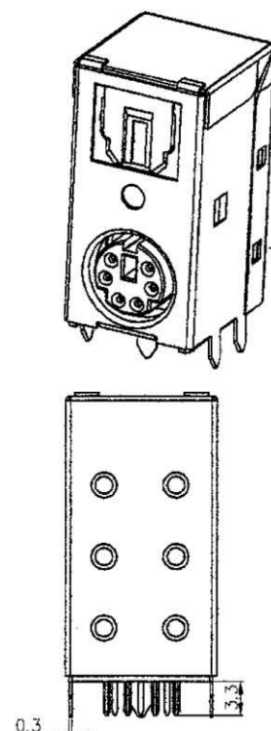


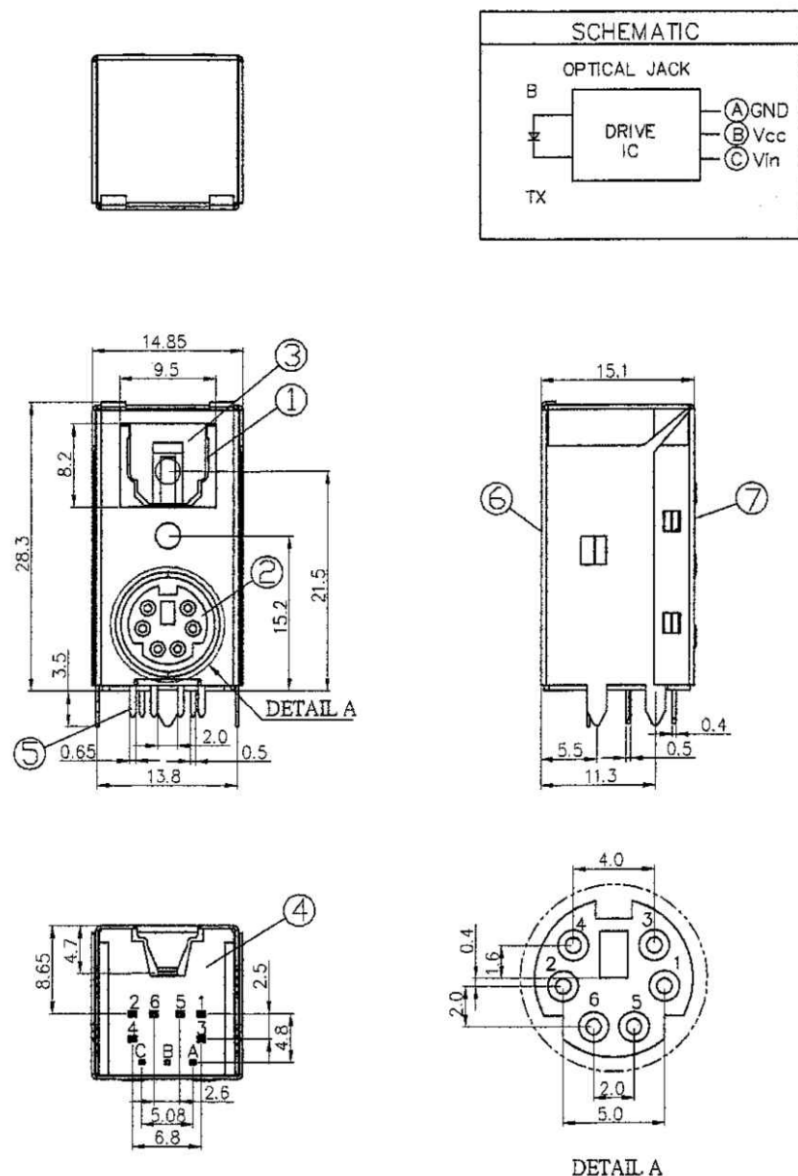

- SPECIFICATIONS:**
1. RoHS COMPLIANT
 2. CURRENT RATING: DC 2A 12V Max.
 3. CONTACT RESISTANCE: 30mΩ MAX
 4. INSULATION RESISTANCE: 500MΩ MIN. AT DC 500V.
 5. WITHSTANDING VOLTAGE: 500V AC PER 1 MINUTE
 6. OPERATING TEMPERATURE: -25°C ~ +70°C
 7. INSERTION FORCE: Mini din: 0.5kg ~ 4.5kg
OPTICAL JACK: 3.5kg Max.
 8. EXTRACTION FORCE: Mini din: 0.4kg ~ 3.5kg
OPTICAL JACK: 0.4kg Min.
 9. UNLESS OTHER SPECIFIED, TOLERANCE IS ± 0.25mm.

7.	BACK SHELL	1	SPCC-SD T=0.3	Nickel plated	Cu underplating
6.	FRONT SHELL	1	SPCC-SD T=0.3	Tin plated	Ni underplating
5.	MINI TERMINAL	6	BRASS T=0.2	Contact area gold flash Solder area Sn 100%	Ni underplating
4.	BACK COVER	1	THERMOPLASTIC	BLACK	UL94V-0
3.	BOTTOM COVER	1	THERMOPLASTIC	BLACK	UL94V-0
2.	MINI DIN HOUSING	1	PBT	PURPLE	UL94V-0
1.	OPTICAL JACK	1set		BLACK	Transmitter
P/N	PART NAME	Q'TY	MATERIAL	PLATING	REMARKS

RoHS Compliant


TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY	X, ±
CHECKED BY GENIUS	.X ±
UNIT / mm	.XX ±
SCALE 1 : 1	.XXX ±
DATE	ANG ±
SIZE A4	PPOJECTION



ORDER INFORMATION

POFMD-FRM5SEPP-T06-LF

SERIES | LEADFREE

FEMALE | TX 6PIN

DIP 90° | SHUNT

METAL POST X5

DESCRIPTION: