MATERIAL
Insulator: Thermal Plastic UL94V-0
Contacts: Copper Alloy
Shell: Stainless Steel
CONTACT PLATING
Underplate: 50u"~100U" Nickel
Contact Area: 1u" Selective Gold
Solder Tails Area: 100u"~160u" Tin(Lead Free)
ELECTRICAL
Operation Voltage: 3.3V
Current Rating: 0.5 A.
Contact Resistance: 100 ohms Max.
Insulation Resistance: 1000 Mohms Min. @ 500 VDC
Dielectric Withstanding Voltage: 500 VAC / Minute
Operating Temperature: -25°C To +90°C
Mating Cycles: 10,000 Cycles,Spring Is not Breaking

SDC-W24PB02-09-LF
LEADFREE
RoHS Compliant



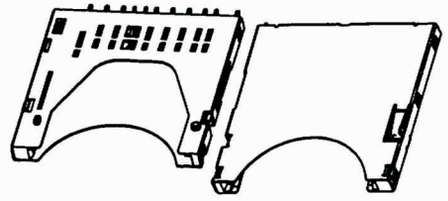

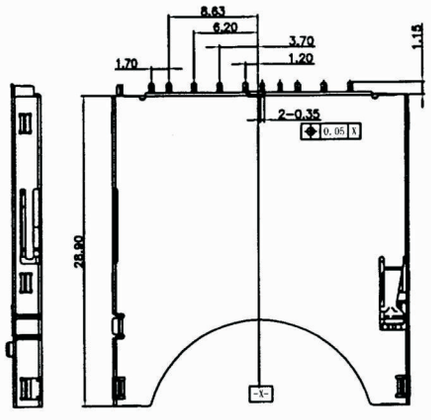

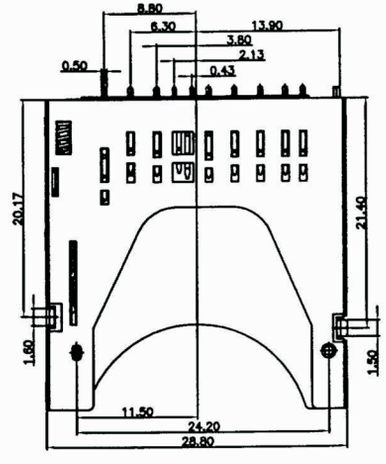

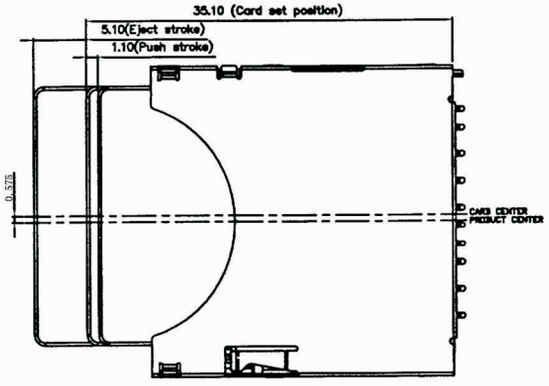

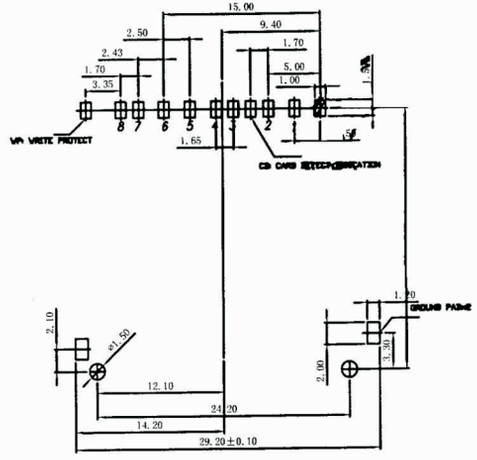

CIRCUIT:		
WP GROUND CD #3 WITHOUT CARD	WP GROUND CD #3 CARD INSERTED WRITE PROTECT : LOCK	WP GROUND CD #3 CARD INSERTED WRITE PROTECT : UNLOCK

MORETHANALL CONNECTORS ASSEMBLIES

煜倫股份有限公司

PART NO. SDC-W24PB02- 09							
DWG NO. SDC-W24PB02- 09		CHECKED BY CY	TOLERANCES ARE .X ± 0.2 .XX ± .XXX ± AWG	DESCRIP TION:			
FILE NO.		DRAWING BY					
UNIT / mm	SCALE 1 : 1	PROJECTION		AREA	REVISIONS	HK	DATE