


MATERIAL: HOUSING-PBT POLYESTER UL-94V-0  
 MIXED GLASS FIBER.  
 STANDARD COLOR-BLACK  
 CONTACTS-0.35mm THICK PHOS-BRONZE  
 PLATED WITH HARD GOLD AND  
 TIN/LEAD IN SOLDER AREA.  
 SHIELD-0.25mm THICK COPPER ALLOY,  
 PLATED WITH TIN/LEAD.  
 CAVITY CONFORMS TO FCC RULES AND REGULATIONS  
 PART 68,SUBPART F.

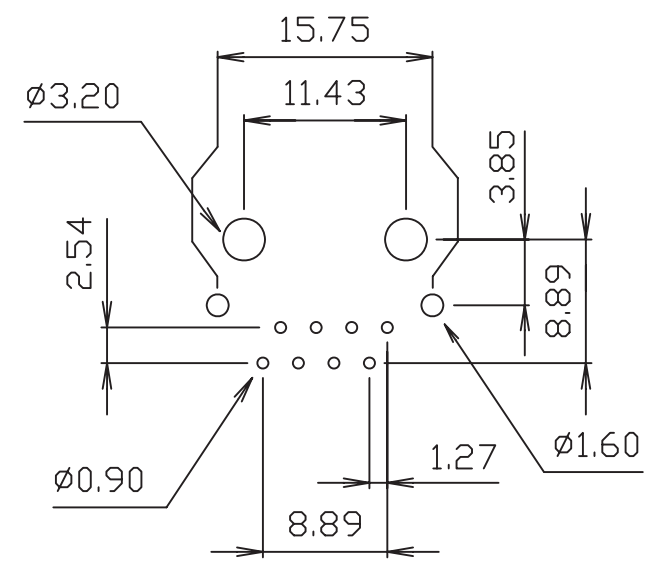


PC Board Layout


**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES  
 煜倫股份有限公司  
 www.morethanall.com

**RoHS Compliant**

DRAWING BY CY		TOLERANCES ARE X. ± .X ± 0.25 .XX ± 0.13 .XXX ± ANG ±
CHECKED BY GENIUS		
UNIT/mm	SCALE 1:1	
DATE		
SIZE A4	P PROJECTION	



**ORDER INFORMATION**

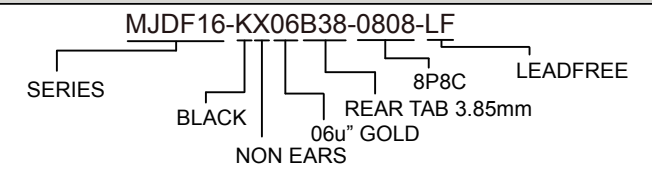

DESCRIPTION: 8POSITION FLAT PIN SHIELDED TOP ENTRY PCB JACK