



**MATERIAL:**

INSULATOR : PBT, UL 94V-0.  $\Delta$   
 CONTACT : COPPER ALLOY.  
 CONTACT FINISH : GOLD OVER NICKEL.  
 SHELL : STEEL.  
 BOARDLOCK : BRASS, TIN PLATED.  
 RIVETED INSERT : BRASS, NICKEL PLATED.

**SPECIFICATION:**

CURRENT RATING : 5 AMP  
 DIELECTRIC WITHSTANDING VOLTAGE : 1000V AC FOR 1 MINUTE.  
 INSULATION RESISTANCE : 1000M $\Omega$  MIN. AT 500V DC.  
 CONTACT RESISTANCE : 15m $\Omega$  MAX.  
 OPERATING TEMPERATURE : -55°C ~ +105°C.

DRF-PGN-xx-LF  
 LEADFREE  
 RoHS Compliant

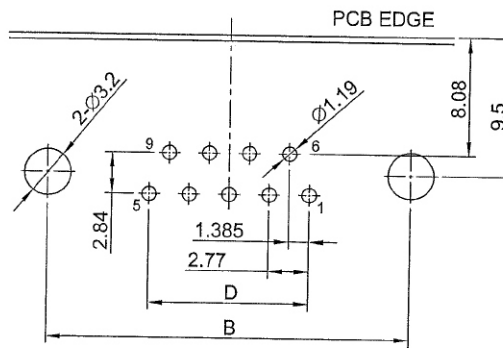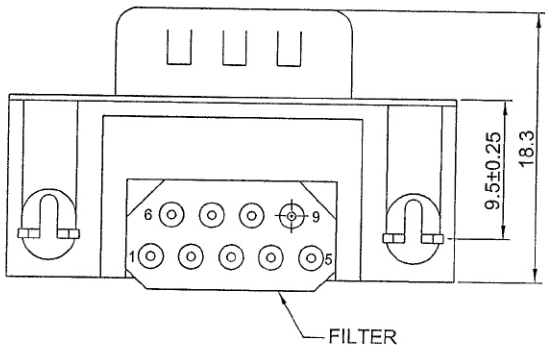

POSITION	A ± 0.20	B ± 0.20	C ± 0.38	D
09 PIN	16.90	25.00	30.80	11.08
15 PIN	25.25	33.30	39.20	19.39
25 PIN	38.95	47.05	53.05	33.24
37 PIN	55.40	63.50	69.40	49.86

**MORETHANALL**  
 CONNECTORS  
 ASSEMBLIES

煜倫股份有限公司

PART NO. DRF-PGN-xx		CHECKED BY CY		TOLERANCES ARE .X ± 0.2 .XX ± 0.1 .XXX ± AWG	DESCRIP TION:
DWG NO. DRF-PGN-xx		DRAWING BY			
FILE NO.		PROJECTION		AREA	REVISIONS
UNIT / mm	SCALE 1:1			HK	DATE