
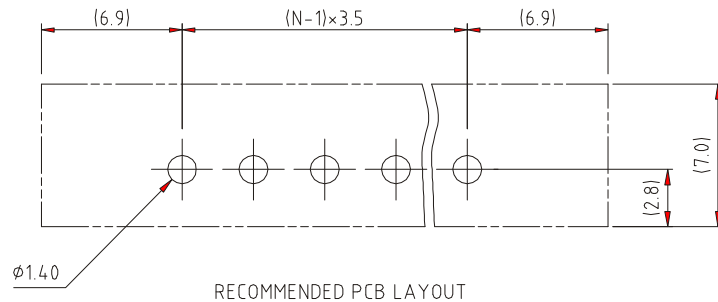


N= Number of concats

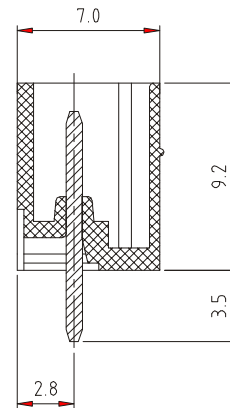

Material

- Terminal body
(contact pin): Brass(CuZn) Tin plated
- With flange nut: Brass M2.5
- Insulator (housing): Thermoplastic (UL94 V-0)

Electrical cULus/CSA

- Voltage rating: 300VAC/125VAC
- Current rating: 10A/8A
- Wire range:
- Solid wire(AWG):
- Stranded wire(AWG):
- Withstanding Voltage: 1.6KV
- Operating temperature: -30°C to +105°C
- Soldering temperature: 245°C±10°C/5 Sec
- Safety Approval:

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION


X, ±

.X ±

.XX ±

.XXX ±

ANG ±



ORDER INFORMATION

TBH035-PDCF-xx-LF

SERIES

MALE

LEADFREE

02~24WAY

FLANGE

CAGE

DIP 180°

DESCRIPTION: