
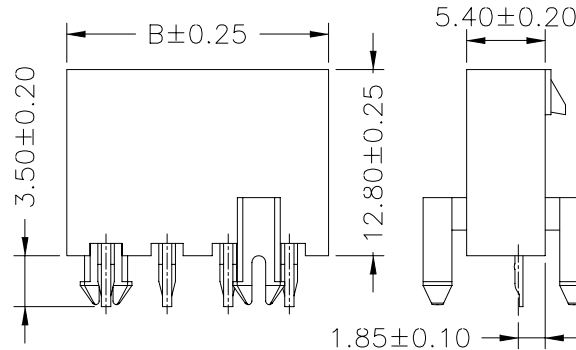
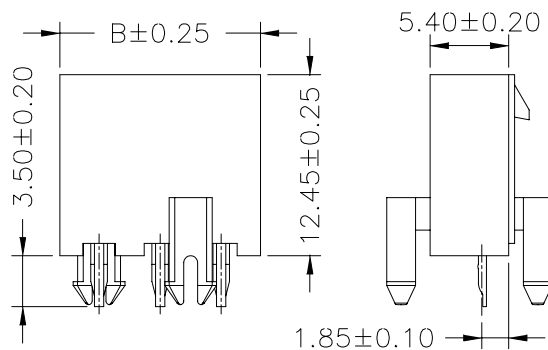
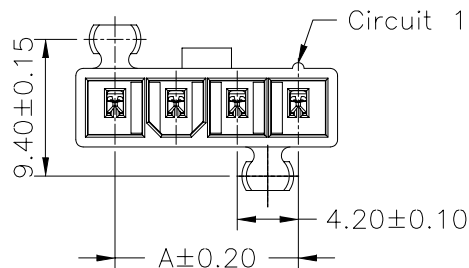
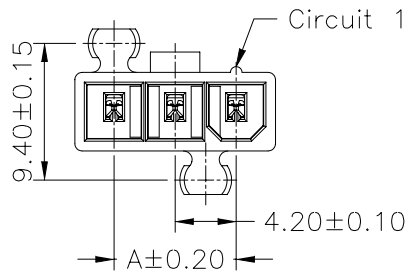


P.C.B LAYOUT

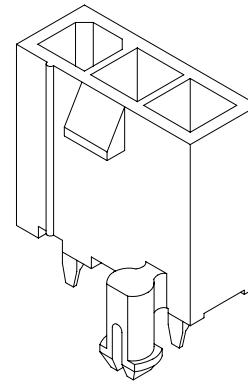

3P

4P,5P

SPECIFICATIONS

Current Rating: 7A AC,DC  
 Voltage Rating: 250V AC,DC  
 Temperature Range: -25°C ~ +85°C  
 Contact Resistance: 10mΩ Max  
 Insulation Resistance: 1000MΩ Min  
 Withstanding Voltage: 1500V AC/minute  
 Pin Material: Brass/Tin-plated  
 Material: Nylon 66,UL94V-2

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
MF-PDP-1X03	8.40	13.80
MF-PDP-1X04	12.60	18.00
MF-PDP-1X05	16.80	22.20



煜倫股份有限公司

PART NO. <b>MF-PDP-1Xxx</b>		CHECKED BY CY		TOLERANCES ARE .X±0.2 .XX± .XXX± AWG	DESCRIPTION: <b>4.20mm PITCH 180° WAFER WITH FOOT, SINGLE ROW, MINI-FIT</b>
DWG NO. <b>MF-PDP-1Xxx</b>		DRAWING BY			
FILE NO.		PROJECTION		AREA	REVISIONS
UNIT / mm	SCALE 1:1			HK	DATE