

1 2 3 4 5 6 7 8 9 0





J
I
H
G
F
E
D
C
B
A

MATERIAL

Insulator : PBT+30% Glass fiber
Contact Pin : brass

SPECIFICATION

Current Rate : 1 AMP
Insulation Resistance : 5000MΩMin. at DC 500V
Contact Resistance : 20mΩMax. at DC 100mA
Dielectric Voltage : 500V AC for one minute
Operation Temperature : -55°C to +105°C

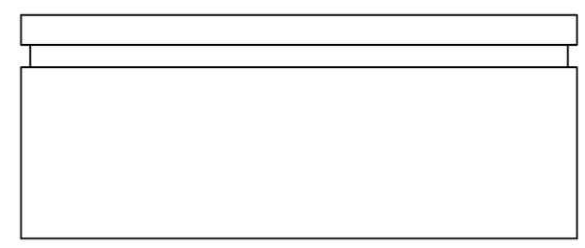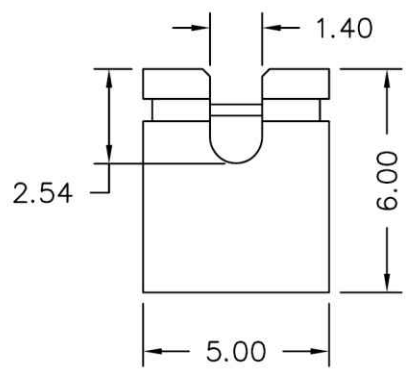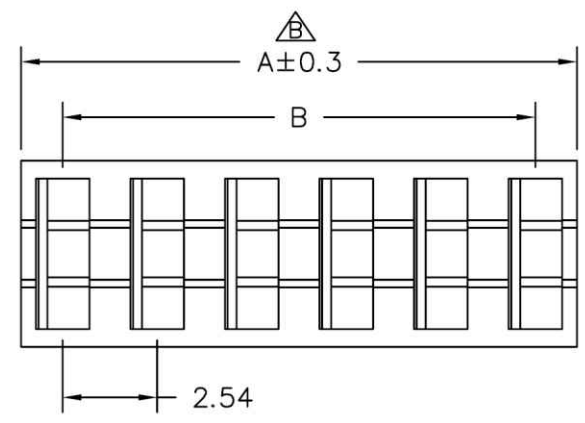

J-BS-2Xxx-LF
LEADFREE
02-15WAY

RoHS Compliant

POLES	DIM A	DIM B
2	4.78	2.54
3	7.32	5.08
4	9.86	7.62
5	12.40	10.16
6	14.94	12.70
7	17.48	15.24
8	20.02	17.78
9	22.56	20.32
10	25.10	22.86
11	27.64	25.40
12	30.18	27.94
13	32.72	30.48
14	35.26	33.02
15	37.80	35.56

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. J-BS-2Xxx

DWG NO. J-BS-2Xxx

CHECKED BY CY

TOLERANCES ARE

DESCRIP TION:

FILE NO.

DRAWING BY

.X ± 0.2
.XX ±
.XXX ±
AWG

AREA REVISIONS HK DATE

煜倫股份有限公司

UNIT / mm

SCALE 1:1

PROJECTION