
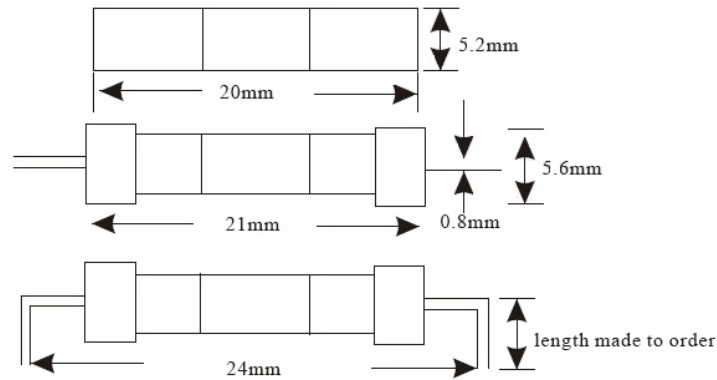
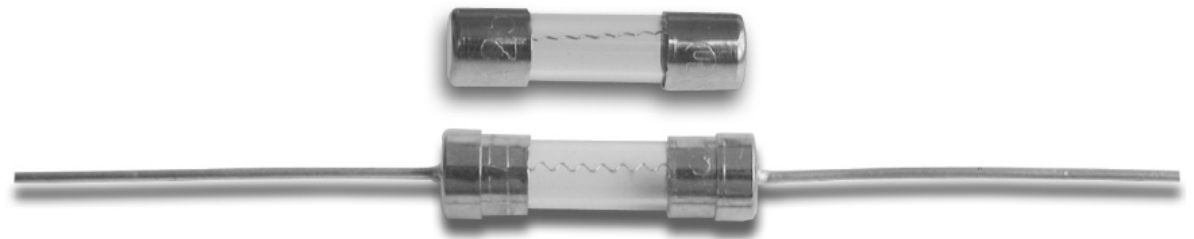


Miniature Glass Fuse 5x20mm Fast Blow (Quick Acting) F-125V/250V

pluggable into miniature fuse-holder or directly mountable on printed circuit boards

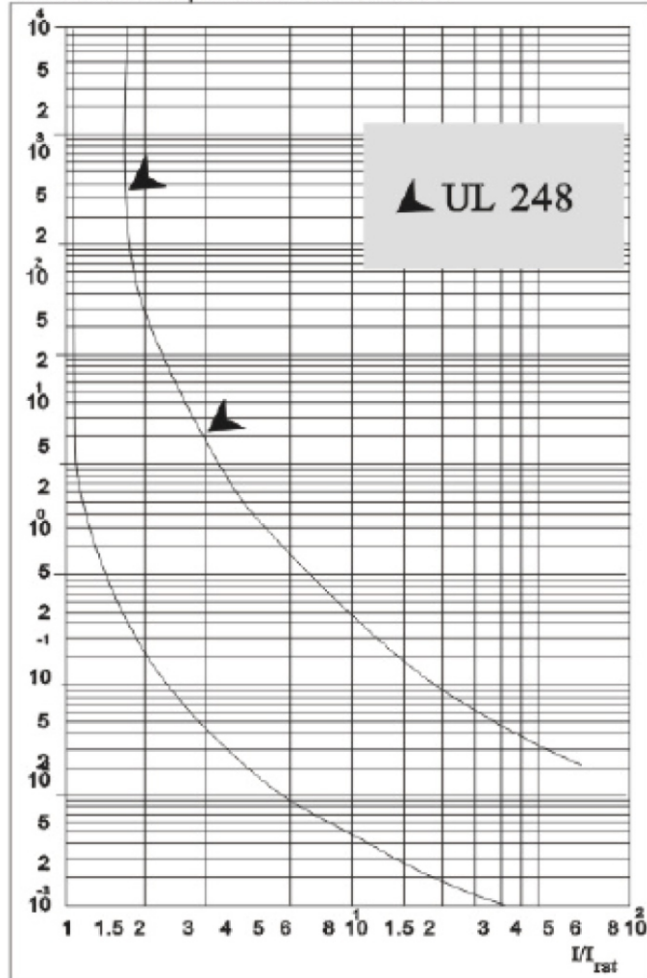

Time current characteristics

Rat. current I_n	$n \times I_n$	$1.1 \times I_n$	$1.35 \times I_n$	$2.0 \times I_n$
100mA-10A		min.	max.	max.
		4h	1h	120s

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION



ORDER INFORMATION

FSG-5X20-xxx-LF

SERIES	LEADFREE
5.2X2.0mm	01A:100mA 012A:125mA 1A:1A 10A:10A

DESCRIPTION:

TYPE	LEAD WIRE	FORMING PITCH, LENGTH	RATED CURRENT	RATED VOLTAGE	VOLTAGE DROP mV	Fusing I ² t at 10xI _n A ² s	BREAKING CAPACITY	APPROVAL	
								CSA	UL
			100mA		6000	0.0011		•	•
			125mA		5400	0.0027		•	•
			150mA		1900	0.0038		•	•
			160mA		4800	0.0069		•	•
			200mA		4000	0.011		•	•
			250mA		3700	0.011		•	•
	L	P:xx, L:xx	300mA	125V/250V 125V/250V	3400	0.02	125Vac 10KA 250Vac 200A	•	•
			315mA		700	0.038		•	•
			400mA		650	0.11		•	•
			500mA		600	0.19		•	•
			600mA		500	0.38		•	•
			800mA		450	0.45		•	•
			1 A		470	1.0		•	•
			1.25 A		450	1.8		•	•
			1.5 A		400	3.0		•	•
			1.6 A		390	3.5		•	•
			1.8 A		385	4.5		•	•
			2 A		380	6.3		•	•
			2.5 A		360	11		•	•
			3 A		340	20		•	•
			3.15 A		335	25		•	•
			4 A		320	38		•	•
			5 A		300	63		•	•
			6 A		290	100		•	•
			7 A		280	150		•	•
			8 A		270	300		•	•
			10 A		260	350		•	•

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION 



ORDER INFORMATION

FSG-5X20-xxx-LF

SERIES

5.2X2.0mm

LEADFREE

01A:100mA

012A:125mA

1A:1A

10A:10A

DESCRIPTION: