




1. Specifications

- 1.1 Current Rating: 3Amp
- 1.2 Insulation Resistance: 1000MΩ Min.
- 1.3 Dielectric Withstanding: 600V AC/DC
- 1.4 Contact Resistance: 20mΩ Max.
- 1.5 Operating Temperature: -40°C to +105°C

2. Materials

- 2.1 Contact Material: Phosphor Bronze
- 2.2 Insulation Material: Polyester, UL 94V-0
  - B= Nylon 6T Black
  - C= LCP Black
- 2.3 All materials must be GP materials

3. Ordering Information

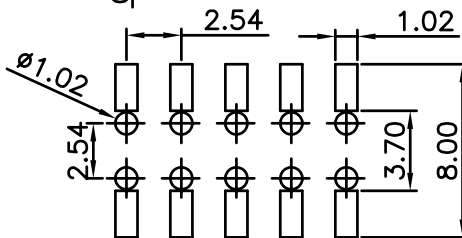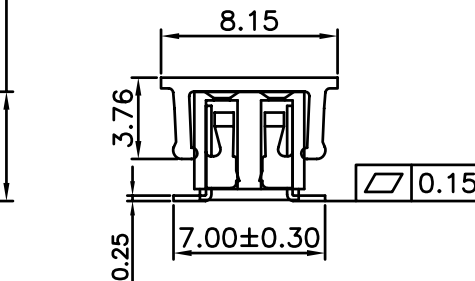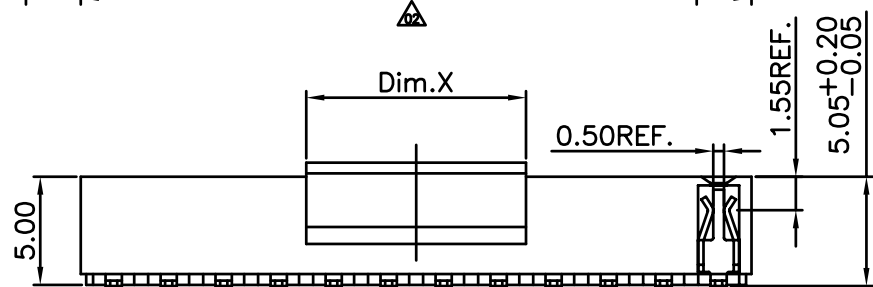

RECOMMENDED P.C.B LAYOUT FOR BOTTOM ENTRY

(Tolerance: ±0.05)

F-Z50XC-2Xxx-LF  
LEADFREE

RoHS Compliant

Name	Dim.X	NOTE
acetate tape	5.00mm	02~25pins
	10.00mm	26~40pins
CAP	4.00mm	02~08pins
	10.15mm	09~40pins



PART NO. F-Z50XC-2Xxx

DWG NO. F-Z50XC-2Xxx

CHECKED BY CY

TOLERANCES ARE

.X ± 0.2  
.XX ± 0.1  
.XXX ±  
AWG

FILE NO.

DRAWING BY

DESCRIPTION:


2.54 FEMALE HEADER  
DUAL ROWS SMT TYPE CONNECTOR

煜倫股份有限公司

UNIT / mm

SCALE 1:1

PROJECTION



AREA

REVISIONS

HK

DATE