

RECOMMEND P.C.B LAYOUT  
PCB TOLERANCE:±0.05

NOTES:

1. MATERIALS

HOUSING: (SEE TABLE), UL94V-0, COLOR: (SEE TABLE).

CONTACTS: BRASS.

SHELL: BRASS.

2. FINISH:

CONTACTS: 2.54μm [100μ"] MIN. BRIGHT-TIN OVER

1.27μm [50μ"] MIN. NICKEL PLATED.

SHELL: 2.54μm [100μ"] MIN. BRIGHT-TIN ON SOLDERTAILS,

1.27μm [50μ"] MIN. NICKEL OVER ALL.

HALOGEN FREE PA66 +30GF	WHITE
HOUSING MATERIAL	HOUSING COLOR

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS


UNIT/mm SCALE 1:1

DATE


SIZE A4

X. ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±

P PROJECTION



ORDER INFORMATION

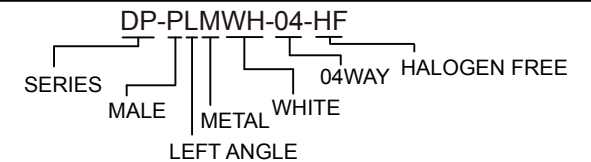

DESCRIPTION: POWER CONNECTOR, 4 POSITION PLUG, RIGHT ANGLE, DIP.