

Features:


- 2 ~ 24 circuits available
- 600V volts rating (R.M.S.)
- Current rating up to 9 amperes per circuits
- Positive housing locks

Specification:

- Current rating and wire size:

Wire Size AWG	Circuits			
	2	4, 6	8, 10	12~24
# 18	9 A	8 A	7 A	6 A
# 20	7 A	6 A	5 A	5 A
# 22	5 A	4 A	4 A	4 A
# 24	4 A	3 A	3 A	3 A

- Voltage rating: 600V AC, DC
- Insulation resistance: DC 500V 1000MΩ min.
- Dielectric withstanding voltage: 1500V AC/minute
- Ambient temperature range: -40°C ~ 105°C
(including temperature rise)

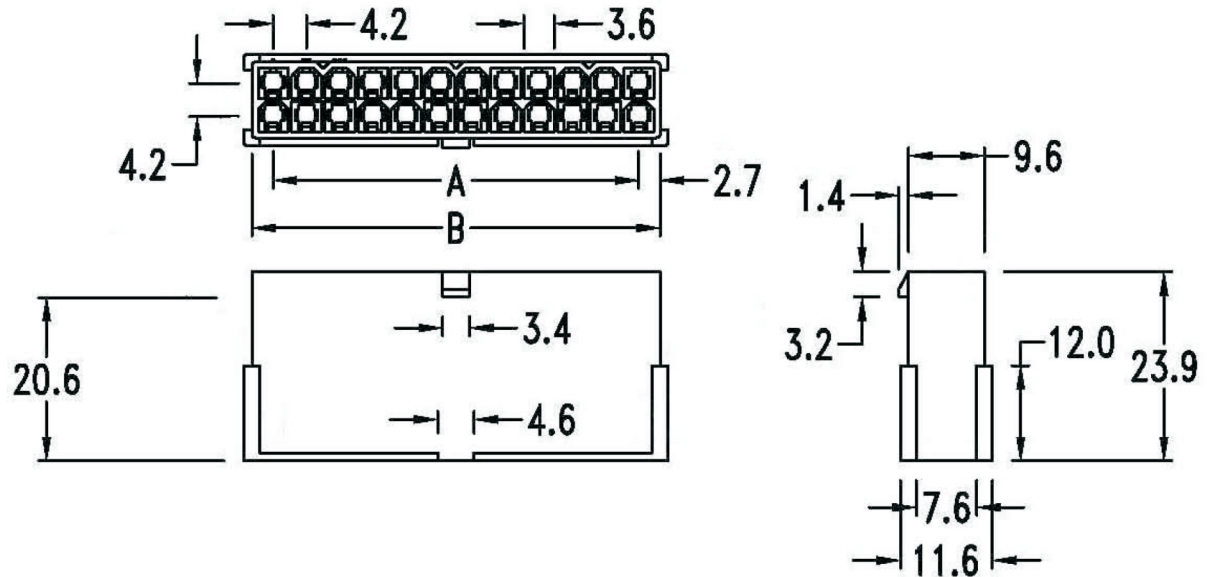

MF-PHX-2Xxx-LF
LEADFREE
2X01~2X12WAY
(02) (24)
RoHS Compliant

Dimensional Information (mm)

Circuits	Dim. A	Dim. B
2		5.4
4	4.2	9.6
6	8.4	13.8
8	12.6	18.0
10	16.8	22.2
12	21.0	26.4

Circuits	Dim. A	Dim. B
14	25.2	30.6
16	29.4	34.8
18	33.6	39.0
20	37.8	43.2
22	42.0	47.4
24	46.2	51.6



PART NO. MF-PHX-2Xxx		CHECKED BY CY		TOLERANCES ARE		DESCRIP TION:				
DWG NO. MF-PHX-2Xxx		DRAWING BY		.X ± 0.2 .XX ± .XXX ± AWG						
FILE NO.		PROJECTION		AREA		REVISIONS	HK	DATE		

煜倫股份有限公司