

SPECIFICATIONS:


Current rating:5.0AAC,DC
 Voltage rating:250V AC,DC
 Contact resistance:20MΩ max
 Insulation resistance: 1,000MΩ min
 Withstanding voltage:1,500V AC/minute
 Temperature range:-25°C to +125°C
 Application wires:AWG#26 to #18

MATERIAL:

Insulator: Nylon 66 UL94V-0
 Contact: Brass
 Finish: Tin Plated
 PS-F- 18 : (7,000 pcs In One Roll)

PS-F-18-LF

LEADFREE

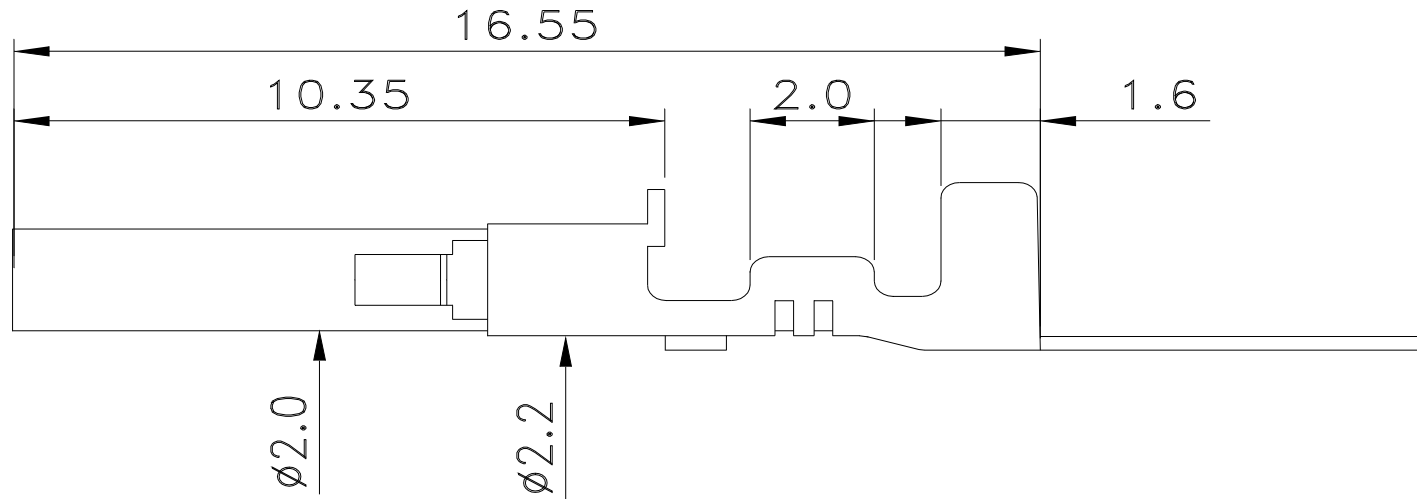

RoHS Compliant



PART NO. **PS-F-18**

DWG NO. **PS-F-18**

CHECKED BY CY

TOLERANCES ARE

DESCRIP TION:

FILE NO.


DRAWING BY

.X ± 0.2
 .XX ±
 .XXX ±
 AWG

UNIT / mm

SCALE 1:1

PROJECTION



AREA

REVISIONS

HK

DATE

煜倫股份有限公司