
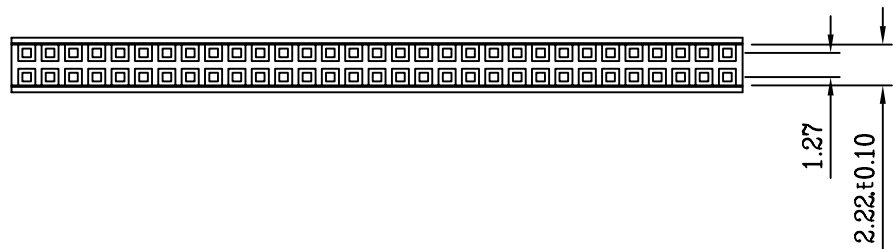
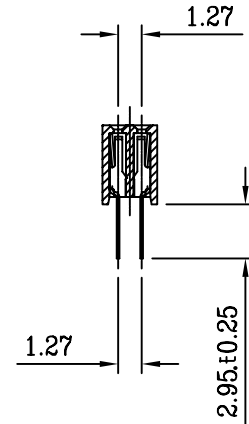


CONTACT RESISTANCE: 20m OHMS MAX. AT DC 100mA
 INSULATOR RESISTANCE: 1000M OHMS MIN. AT DC 500V
 CURRENT RATING: 1 AMP

DIELECTRIC WITHSTANDING VOLTAGE: AC 500V FOR 1 MINUTE
 OPERATING TEMPERATURE: -55°C - +105°C
 CONTACT: PHOSPHOR BRANZE
 HOUSING: L.C.P.(Black Color)

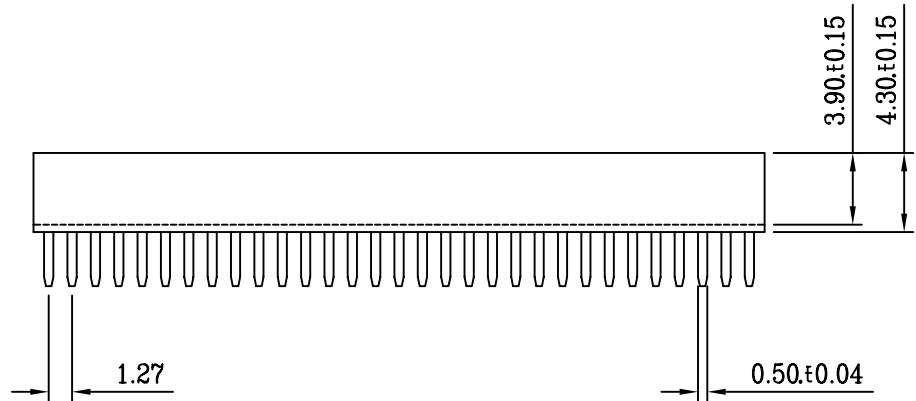

MORETHANALL
 CONNECTORS
 ASSEMBLIES

PART NO. YA-D43-2Xxx

DWG NO. YA-D43-2Xxx

CHECKED BY CY

TOLERANCES ARE

DESCRIP TION: **1.27x1.27mm Dip Socket (Straight/Base:4.3mm)**

FILE NO.

DRAWING BY

X ± 0.15
 .XX ± 0.10
 .XXX ± 0.05
 AWG

AREA	REVISIONS	HK	DATE
------	-----------	----	------

煜倫股份有限公司

UNIT / mm

SCALE 1:1

PROJECTION