
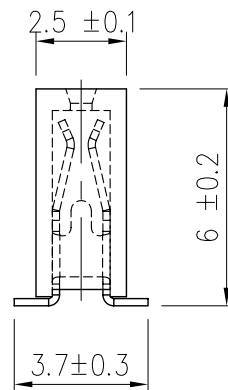
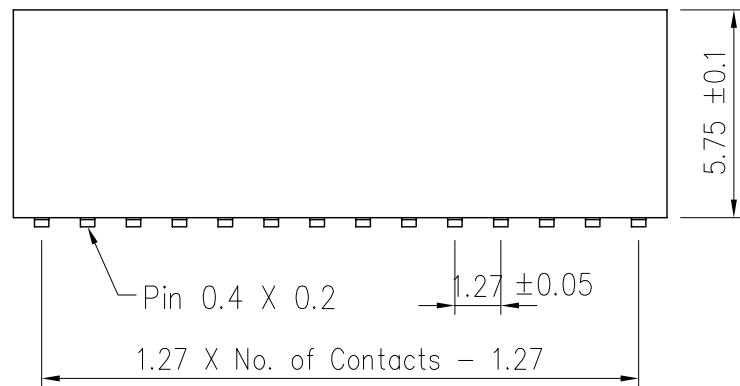


Specifications


Current Rating : 3 Amps
 Insulator Resistance : 1000 Megohms min.
 Contact Resistance : 20 m ohms max.
 Dielectric Withstanding : AC 600V
 Operating Temperature : -40°C ~ +105°C
 Max. Processing Max. : 230°C for 30~60 Seconds
 (260°C for 10 Seconds)
 Contact Material : Phosphor Bronze
 Insulator Material : Polyester, UL 94V-0
 Standard : Nylon-6T
 Contact Plated : Full Gold, Full Tin, Selective Plated

Y-V60X-1XxxL-LF
 LEADFREE

RoHS Compliant

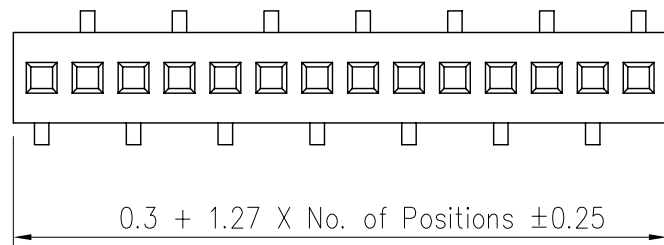

Recommended
P.C. Board Layout

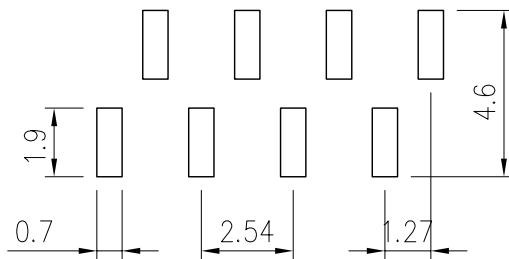

MORETHANALL
CONNECTORS
ASSEMBLIES

焯倫股份有限公司

PART NO. Y-V60X-1XxxL	
DWG NO. Y-V60X-1XxxL	
FILE NO.	
UNIT / mm	SCALE 1:1

CHECKED BY CY	DRAWING BY
PROJECTION	

TOLERANCES ARE
.X ±0.2
.XX ±
.XXX ±
AWG

DESCRIP TION:
AREA

Female Header P1.27X2.54mm Profile : 5.75mm, Single Row, SMT Type			
REVISIONS	HK	DATE	