

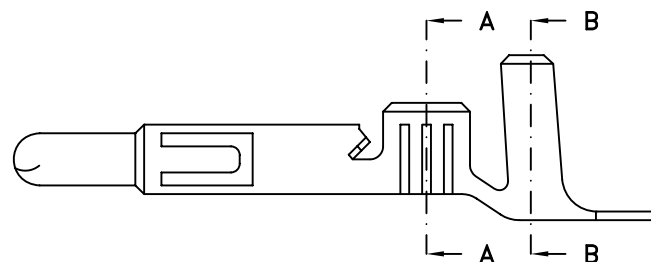



**Specifications:**

- Current rating: 13A
- Voltage rating: 600V
- Ambient temperature range: -55°C ~ 105°C

UL-M-xx-LF  
LEADFREE  
RoHS Compliant

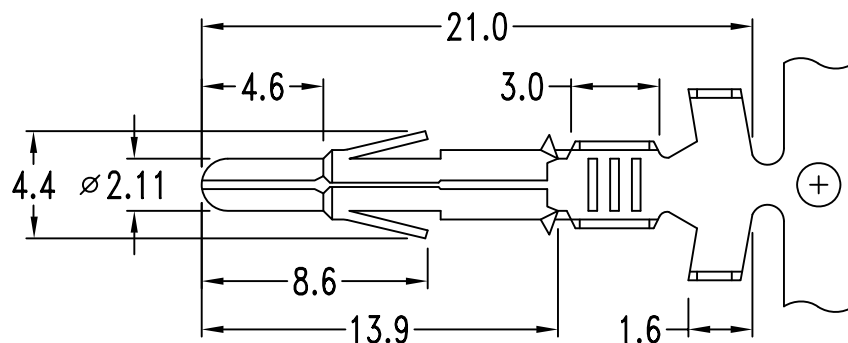

**Ordering & Dimensional Information ( mm )**

Part No.	Dimension				Wire range	Material	Thickness	Finish
	a	b	c	d				
UL-M-18	2.4	2.4	3.4	3.4	#18 ~ #22	Brass	0.3mm	Tin-plated
UL-M-16	3.5	3.2	4.0±0.4	4.5±0.4	#16 ~ #20			
UL-M-12	3.5	3.2	5.5±0.4	5.9±0.4	#12 ~ #14			
UL-MG-18	2.4	2.4	3.4	3.4	#18 ~ #22			Contact area: Gold-flash Other: Tin-plated
UL-MG-16	3.5	3.2	4.0±0.4	4.5±0.4	#16 ~ #20			
UL-MG-12	3.5	3.2	5.5±0.4	5.9±0.4	#12 ~ #14			

&& x means the u" of gold flash.



PART NO. UL-M-xx		CHECKED BY CY	TOLERANCES ARE .X ± 0.2 .XX ± .XXX ± AWG	DESCRIP TION: .25"(6.35mm) Male Crimp Terminal			
DWG NO. UL-M-xx				DRAWING BY	AREA	REVISIONS	HK
FILE NO.		PROJECTION					
UNIT / mm	SCALE 1:1						

煜倫股份有限公司