

**Specifications**

Current Rating: 3Amp  
 Insulation Resistance: 1000MΩ Min.  
 Dielectric Withstanding: 600V AC  
 Contact Resistance: 20mΩ Max.  
 Operating Temperature: -40°C to +105°C

**Materials**


Contact Material: Copper Alloy  
 Insulation Material: Polyester, UL 94V-0 P.B.T  
 All materials must be GP materials

**T-R74-xx-LF**  
 LEADFREE

**RoHS Compliant**

Recommended P.C.Board

Hole Layout

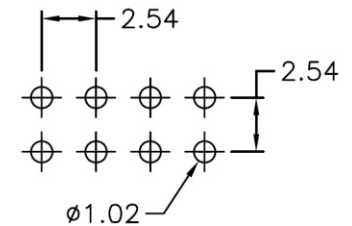

PART NO. **T-R74-xx**

DWG NO. **T-R74-xx**

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

.X ± 0.2  
 .XX ±  
 .XXX ±  
 AWG

DESCRIPTION:

AREA

REVISIONS

HK

DATE

焯倫股份有限公司