
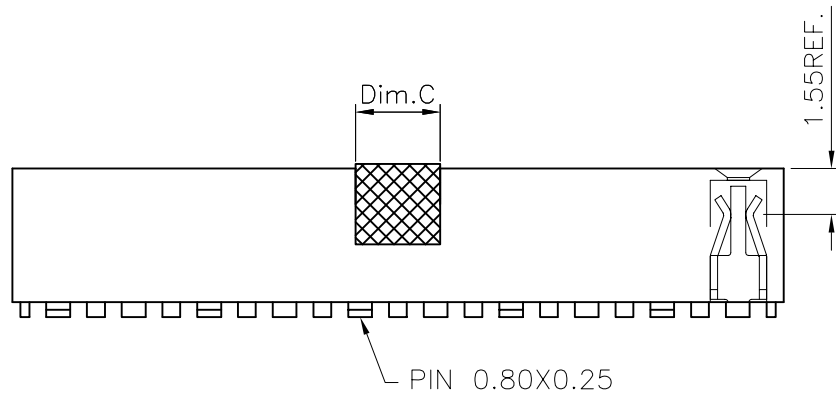
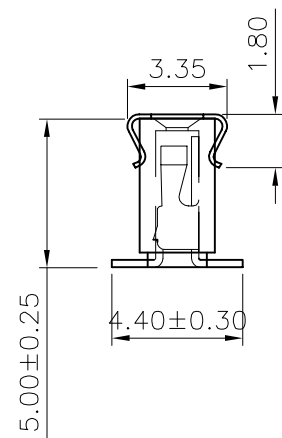


1 2 3 4 5 6 7 8 9 0


J
I
H
G
F
E
D
C
B
A

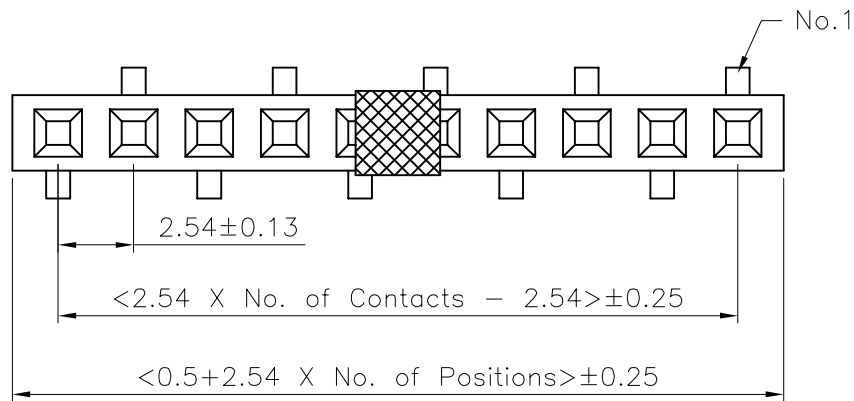

Specifications

Current Rating: 3Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 600V AC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C
Materials
 Contact Material: Phosphor Bronze
 Insulation Material: Polyester, UL 94V-0
 Nylon 6T
 All materials must be GP materials

Recommended P.C.Board
 Bottom Entry Layout
 (Tolerance: ±0.05)

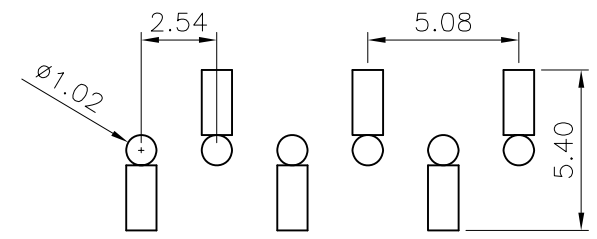

Recommended P.C.Board
 Top Entry Layout
 (Tolerance: ±0.05)

F-Z50XC-1XxxL-LF
 LEADFREE

RoHS Compliant



PART NO. F-Z50XC-1XxxL

DWG NO. F-Z50XC-1XxxL

CHECKED BY CY

TOLERANCES ARE

DESCRIP TION: 2.54 FEMALE HEADER DUAL ROWS SMT TYPE
 BASE 5.00H

FILE NO.

DRAWING BY

.X ± 0.2
 .XX ± 0.1
 .XXX ±
 AWG

AREA	REVISIONS	HK	DATE
------	-----------	----	------

煜倫股份有限公司

UNIT / mm

SCALE 1:1

PROJECTION