
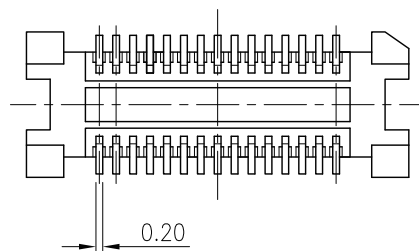



RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ±0.05

Notes:

1. Material:
Housing is High Temperature Thermoplastic
Terminal is Brass thickness is 0.15 mm
2. Plating:
1.27 um min. Nickel over all
Gold Flash all over
3. Coplanarity is 0.1 mm max. on datum A
4. True-position is 0.1 mm max. on datum B

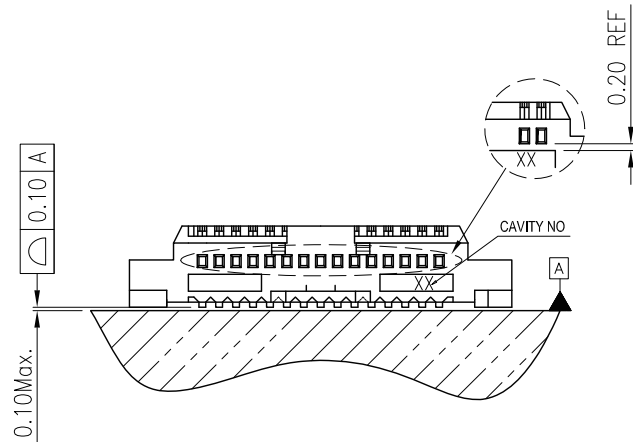

P/N	Ckts	Dim A	Dim B	Dim C
NP0518-P07XCR-020	20	4.50	5.24	8.80
NP0518-P07XCR-030	30	7.00	7.74	11.30
NP0518-P07XCR-040	40	9.50	10.24	13.80
NP0518-P07XCR-050	50	12.00	12.74	16.30
NP0518-P07XCR-060	60	14.50	15.24	18.80
NP0518-P07XCR-070	70	17.00	17.74	21.30
NP0518-P07XCR-080	80	19.50	20.24	23.80

RoHS Compliant



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS


UNIT/mm SCALE 1:1
DATE

SIZE A4


TOLERANCES ARE

X. ±
.X ±
.XX ± 0.20
.XXX ± 0.10
ANG ±






PJECTION




ORDER INFORMATION

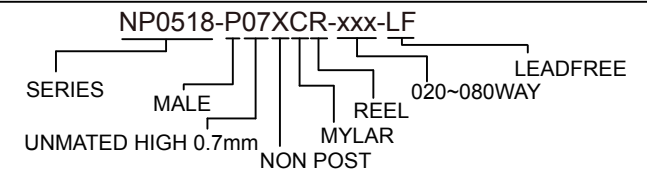

DESCRIPTION: 0.5 mm BTB SMT D/R Plug Type (insert molding)

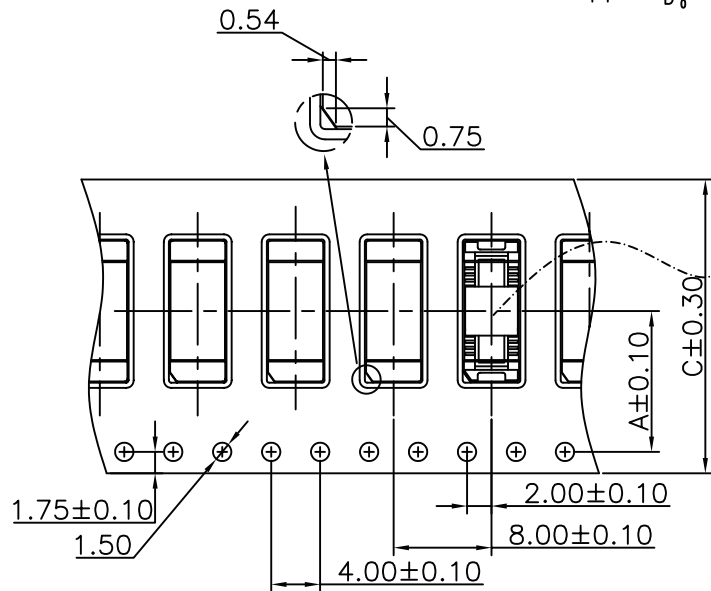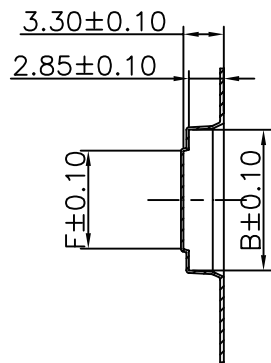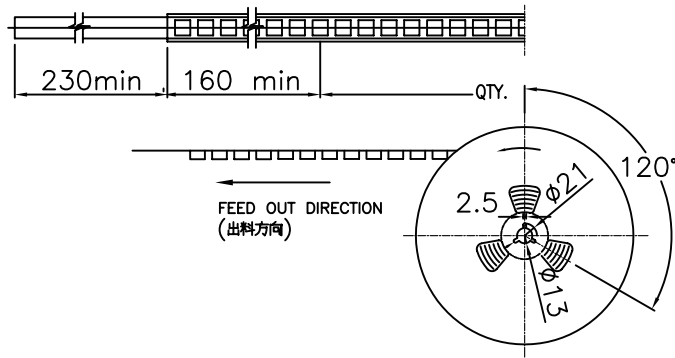

CKT.	A	B	C	D	E	F
30	11.50	11.50	24.00	24.40	N/A	8.00
40		14.00				10.50
80	20.20	24.00	44.00	44.40	40.40	20.50

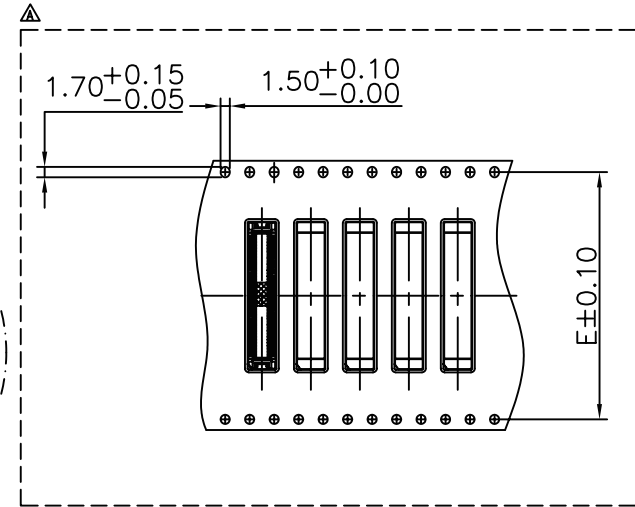

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT/mm


SCALE 1:1

DATE

SIZE A4

PJECTION

X. ±
X ±
.XX ± 0.20
.XXX ± 0.10
ANG ±



ORDER INFORMATION

NP0518-P07XCR-xxx-LF



煜倫股份有限公司

www.morethanall.com

DESCRIPTION: EMBOSSED TAPE PACKING