



M12-5PIN FEMALE RIGHT-ANGLE TO OPEN (COLOR:BLACK,GRAY,YELLOW PVC JACKET)

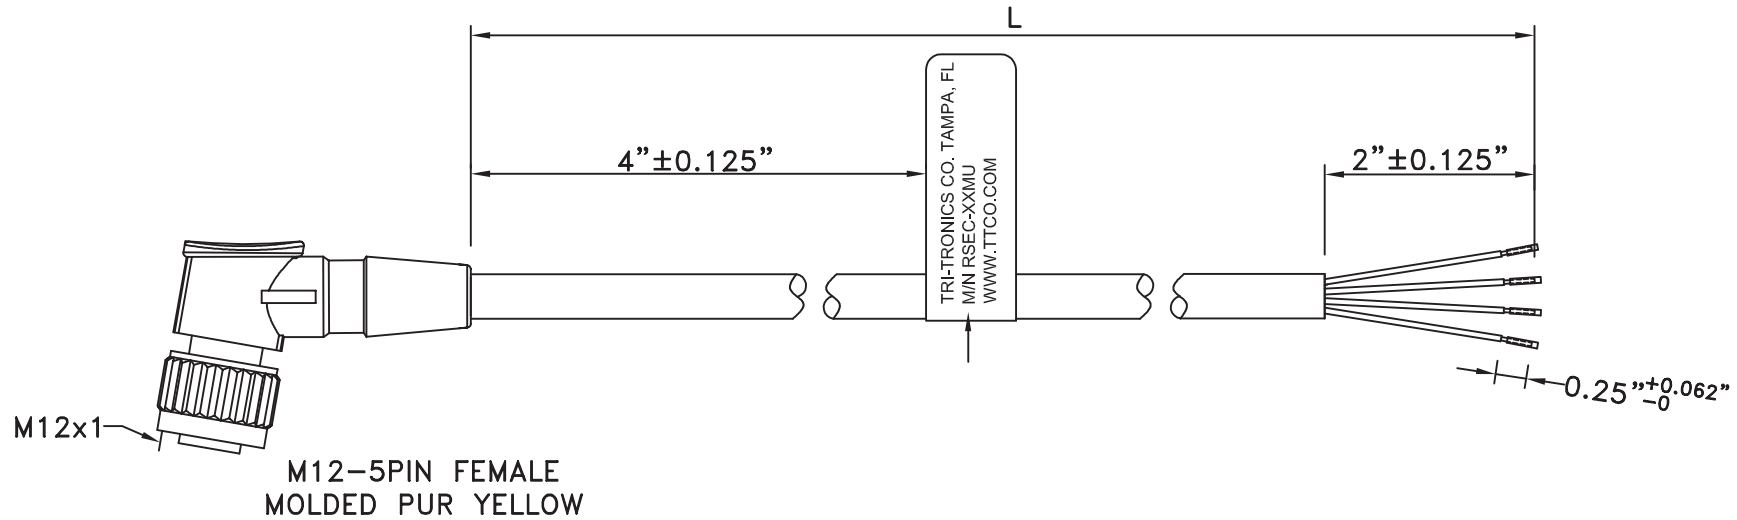

FRONT VIEW

PIN OUT

M12-5PIN FEMALE

| | | |
|---|-------|----|
| 1 | BROWN | NC |
| 2 | WHITE | NC |
| 3 | BLUE | NC |
| 4 | BLACK | NC |
| 5 | NC | |

L=2M/5M/10M METER



煜倫股份有限公司

www.morethanall.com


RoHS Compliant

DRAWING BY CY
 CHECKED BY GENIUS
 UNIT/mm SCALE 1:1
 DATE


TOLERANCES ARE

X. ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

SIZE A4 PROJECTION



ORDER INFORMATION

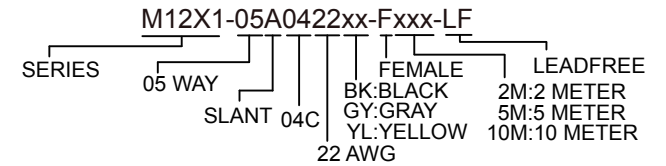

DESCRIPTION:

***CONSTRUCTION:

1.CABLE: * UL2464 (4C/22#)+TISSUE PAPER OD:5.2mm (COLOR:BLACK,GRAY,YELLOW PVC JACKET)

***CONNECTORS:

2.M12-5PIN: * M12-5PIN FEMALE SOLDER TYPE.
 * PIN: BRASS WITH GOLD PLATED.
 * INSULATOR: BLACK NYLON 66 UL 94V-0 RATED.
 * COUPLING NUT: M12x1 BRASS WITH NICKEL PLATED.
 * O-RING: SILICONE RUBBER RED COLOR.
 * MOLDED: PUR COLOR.

3.LABEL: * PRINT: "TRI-TRONICS CO. TAMPA, FL M/N RSEC-XXMU WWW.TTCO.COM"

4.TEST: * CT: 2 Ohm. IS: 5M Ohm.

5.ELECTRICAL: * CURRENT RATING: 4A VOLTAGE RATING: 250V

6.MECHANICAL: * TEMPERATURE: -25°C TO 80°C PROTECTION: IP 68, NEMA 6P

7.PACKING: * PACK EACH CABLE IN A POLY BAG.

8.MATERIAL: * MATERIAL WITH RoHS GRADE.

9.MARKINGS: (1). CABLE TO BE PERMANENTLY MARKED WITH THE FOLLOWING INFORMATION
 (THIS SET OF INFORMATION IS TO REPEAT ITSELF THROUGHOUT THE ENTIRE LENGTH OF THE CORDSET WITH APPX. 6" OF SPACE BETWEEN EACH SET):
 UL CERT. INFORMATION (AWM STYLE, UL FILE NO., CABLE RATINGS,ETC.);
 CSA CERT. INFORMATION (AWM STYLE, CSA FILE NO., CABLE RATINGS,ETC.)
 (2). NO O.E.M. MARKINGS ARE PERMITTED ON THE CABLE OR CONNECTOR
 (3). ID LABEL MAY EITHER BE FLAGGED (AS ILLUSTRATED) OR WRAP AROUND

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS


UNIT/ mm SCALE 1:1

DATE


SIZE A4

X. ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

PJECTION



ORDER INFORMATION

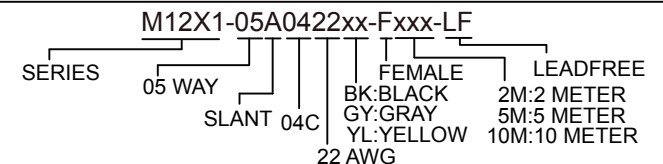

DESCRIPTION: