


S-V45PC-2Xxx-LF  
LEADFREE  
RoHS Compliant

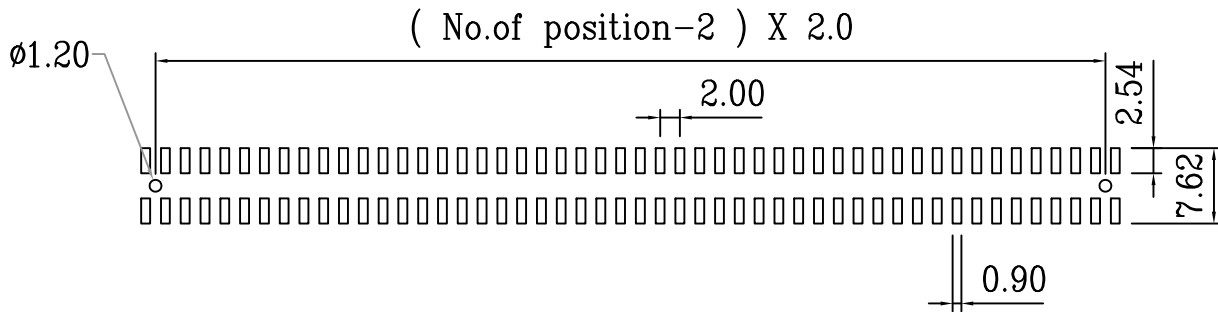

P.C.B.layout

### SPECIFICATIONS

- \* Current Rating : 1 Amps
- \* Insulator resistance: 5000 Megohms min.
- \* Dielectric withstanding: AC 500 V
- \* Operating Temperature: -40°-+105°C
- \* Max Processing Temp: 230° for 30 seconds  
(260° for 7 seconds)
- \* Contact Material: Phosphor bronze
- \* Housing: L.C.P. (UL 94 V-0)

	PART NO. S-V45PC-2Xxx		TOLERANCES ARE .X ± 0.2 .XX ± .XXX ± AWG	DESCRIPTION: 2.0mm Female Socket h=4.5mm type
	DWG NO. S-V45PC-2Xxx			
焯倫股份有限公司	FILE NO.		DRAWING BY	AREA    REVISIONS    HK    DATE
	UNIT / mm	SCALE 1:1	PROJECTION	