

NOTES
 1. MATERIALS: HOUSING-LCP 30%GF UL94V-0.
 CONTACT-PHOSPHOR BRONZE C5191R-H.

SECTION A-A

PCB LAYOUT

VIEW B

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS


UNIT / mm SCALE 1:1

DATE

SIZE A4

X ±
 .X ± 0.30
 .XX ± 0.20
 .XXX ± 0.10
 ANG ± 3°


P PROJECTION



ORDER INFORMATION

BTH-VR-20-LF
 SERIES | LEADFREE
 CR 2032
 REEL
 180°SMT

DESCRIPTION:

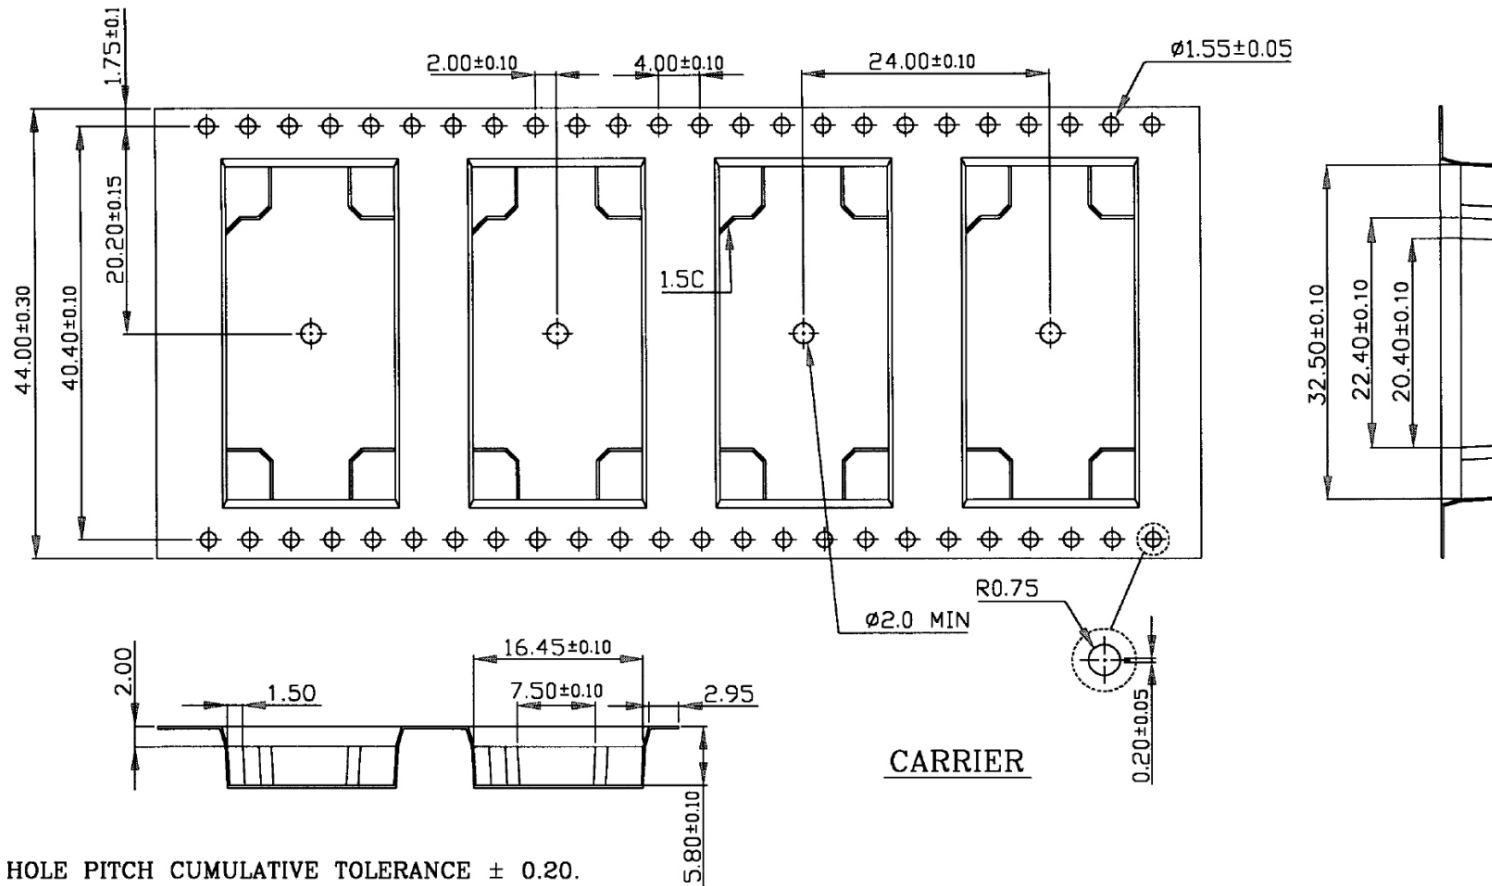

CARRIER

NOTE:

- 1.10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE ± 0.20 .
- 2.CARRIER CAMBER IS WITHIN 1mm in 100mm.
- 3.MATERIAL:BLACK CONDUCTIVE POLYSTYRENE ALLOY (UP-5000)100% RECYCLABLE.
- 4.ALL DIMENSIONS MEET EIA-418-3 REQUIREMENTS.
- 5.THICKNESS:0.36±0.05mm.
- 6.PACKING LENGTH per per 22" REEL:38.5 METERS.
- 7.COMPONENT LOAD PER 13"REEL: 500 PCS.
- 8.PEEL FORCE (300mm/min): 8mm: 30~100g
12~56mm: 30~100g

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1


DATE

SIZE A4

TOLERANCES ARE

X, \pm
.X \pm
.XX \pm
.XXX \pm
ANG \pm

PJECTION



ORDER INFORMATION

BTH-VR-20-LF
SERIES | LEADFREE
| CR 2032
REEL
180°SMT

DESCRIPTION: