


1 2 3 4 5 6 7 8 9 0

J  
I  
H  
G  
F  
E  
D  
C  
B  
A

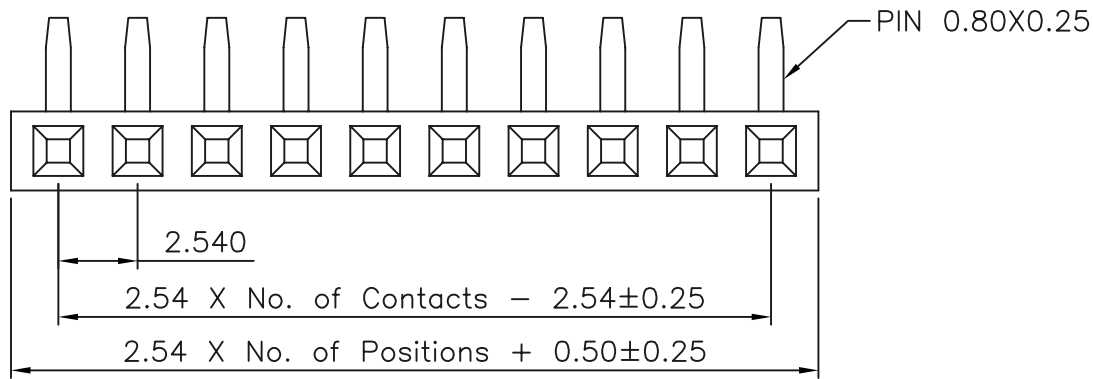


Specifications

Current Rating: 3Amp  
 Insulation Resistance: 1000MΩ Min.  
 Dielectric Withstanding: 600V AC/DC  
 Contact Resistance: 20mΩ Max.  
 Operating Temperature: -40°C to +105°C


Materials

Contact Material: Phosphor Bronze  
 Insulation Material: Polyester, UL 94V-0  
 All materials must be GP materials

注: 02~24PIN塑膠材質用P.B.T料生產,  
 25~40PIN塑膠材質用PA6T+20%料生產.

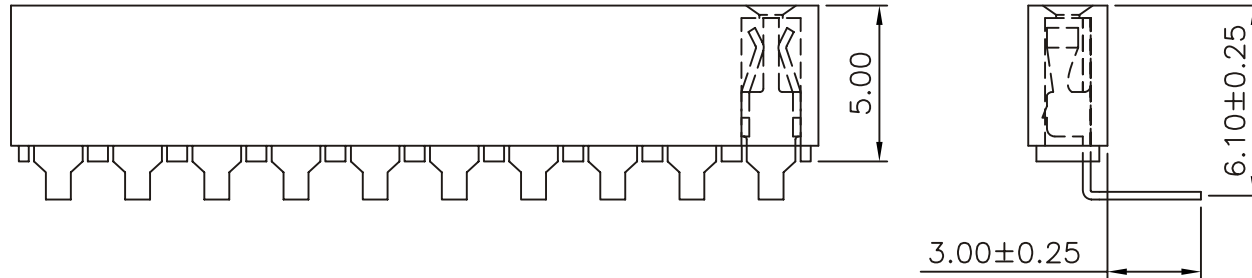

Recommended P.C.Board  
 Hole Layout



F-R50-1Xxx-LF  
 LEADFREE

RoHS Compliant



PART NO. F-R50-1Xxx		CHECKED BY CY		TOLERANCES ARE .X ± 0.2 .XX ± 0.1 .XXX ± .01 AWG	DESCRIP TION: 2.54 FEMALE HEADER SINGLE ROW DIP TYPE BASE 5.00H
DWG NO. F-R50-1Xxx		DRAWING BY			
FILE NO.		PROJECTION		AREA	REVISIONS
UNIT / mm	SCALE 1:1			HK	DATE

煜倫股份有限公司