
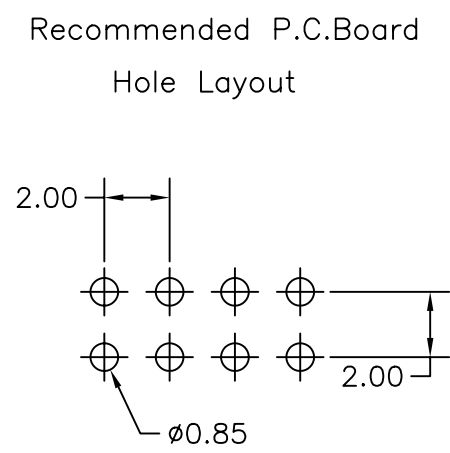
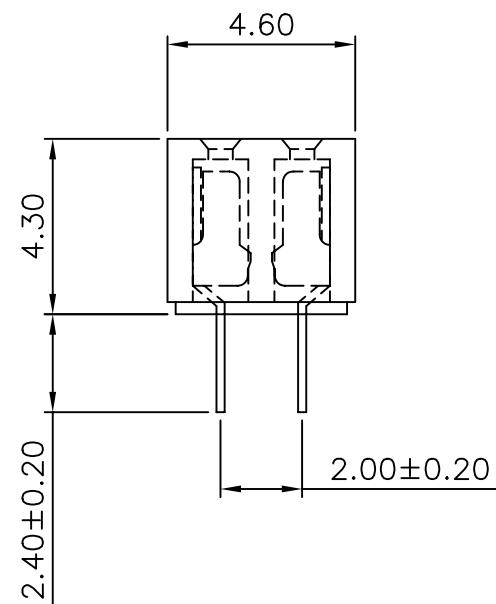
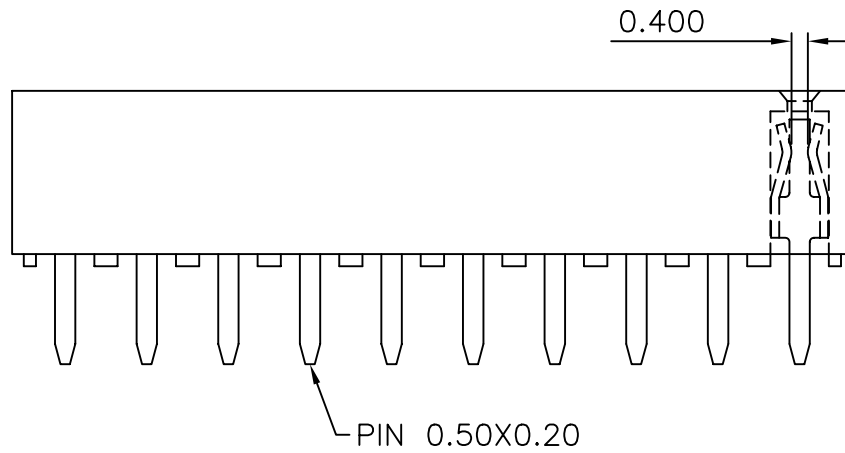


1 2 3 4 5 6 7 8 9 0

J
I
H
G
F
E
D
C
B
A

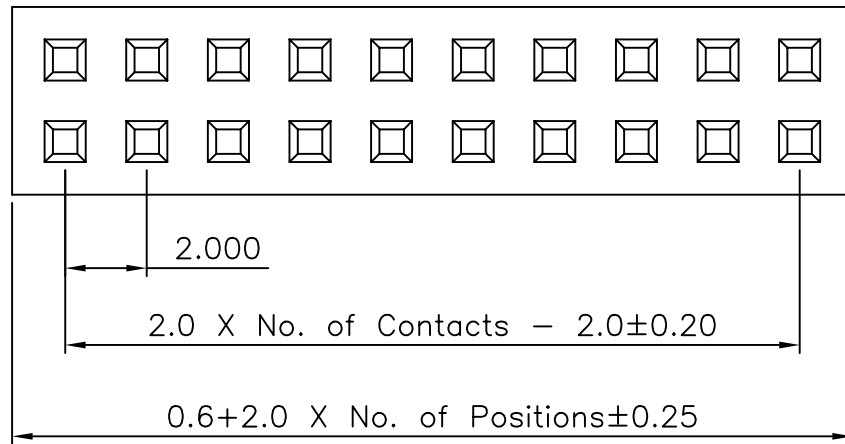

Specifications

Current Rating: 2Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 500V AC/DC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials

Contact Material: Phosphor Bronze
 Insulation Material: Polyester, UL 94V-0
 Nylon-6T

MORETHANALL
 CONNECTORS
 ASSEMBLIES

煜倫有限公司

PART NO. S-D43-2Xxx		APPROVED BY CY		TOLERANCES ARE		DESCRIPTION: 2.00 FEMALE HEADER DUAL ROW DIP TYPE BASE 4.30			
DWG NO. S-D43-2Xxx		DRAWING BY		.X ± 0.38 .XX ± 0.25 .XXX ± 0.13 AWG		AREA REVISIONS HK DATE			
FILE NO.		PROJECTION							
UNIT / mm	SCALE 1:1								