

RECOMMENDED PCB LAYOUT
 RECOMMENDED PCB THICKNESS: 1.6mm
 TOLERANCE: ±0.05 (TOP VIEW)

NOTE:
 CAVITY CONFIRMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F.

1. MATERIAL:
 HOUSING: PBT OR PA46 OR PA9T, WITH GLASS FIBER,
 UL 94V-0, STANDARD COLOR-GRAY.
 CONTACTS: PHOSPHOR BRONZE.
2. FINISH:
 CONTACTS: GOLD PLATED ON ENTIRE CONTACT,
 1.27μm [50μ"] MIN. NICKEL UNDERPLATED
 ALL OVER.
3. "▽" SHOWS QIP INSPECTION POINT.

RoHS Compliant

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT/mm

SCALE 1:1


DATE

SIZE A4

PJECTION


TOLERANCES ARE

X. ±
 .X ± 0.25
 .XX ± 0.13
 .XXX ± 0.05
 ANG ±



ORDER INFORMATION

MJ14S12-xXxx-0404-LF

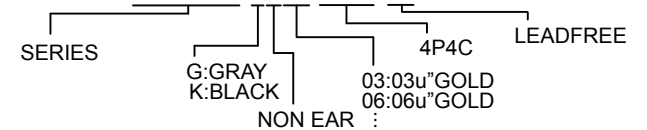

DESCRIPTION: 6*4POSITION, MINI LOW PROFILE, SIDE ENTRY PCB JACK