


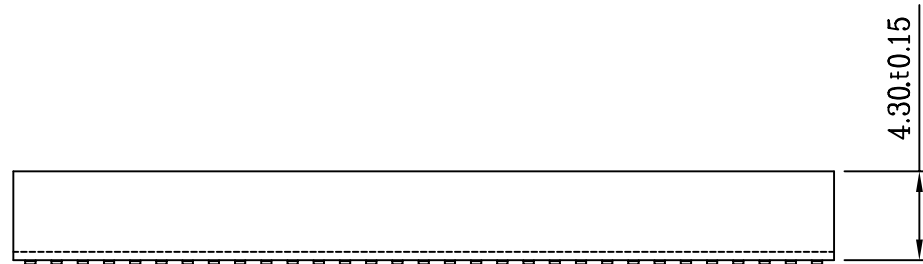


# SPECIFICATIONS

- \* Current Rating : 1 Amps
- \* Insulator resistance: 5000 Megohms min.
- \* Dielectric withstanding: AC 500 V
- \* Operating Temperature: -40°-+105°C
- \* Max Processing Temp: 230° for 30~60 seconds  
(260° for 10 seconds)
- \* Contact Material: Phosphor bronze
- \* Housing: L.C.P (UL 94 V-0)

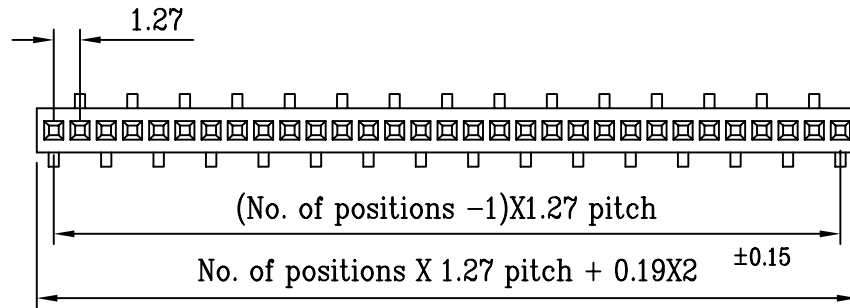

## PCB LAYOUT

**MORETHANALL**  
CONNECTORS  
ASSEMBLIES

PART NO. YA-V45X-1XxxL

DWG NO. YA-V45X-1XxxL

FILE NO.

UNIT / mm

SCALE 1:1

APPROVED BY CY

DRAWING BY

PROJECTION 

TOLERANCES ARE

.X ± 0.15  
.XX ± 0.10  
.XXX ±  
AWG

DESCRIPTION:

**1.27mm SMD Socket**  
(Straight/Base:4.5mm)

AREA

REVISIONS

HK

DATE

煜倫股份有限公司