


**SPECIFICATIONS**  
 Current Rating: 1A AC,DC  
 Voltage Rating: 600V AC,DC  
 Temperature Range: -25°C ~ +85°C  
 Contact Resistance: 10mΩ Max  
 Insulation Resistance: 1000MΩ Min  
 Withstanding Voltage: 1800V AC/minute  
 Pin Material: Brass/Tin-plated  
 Solder Tabs: Brass/Tin-plated  
 Material: Nylon 6T,UL94V-0  
 Color: Natural(Beige)

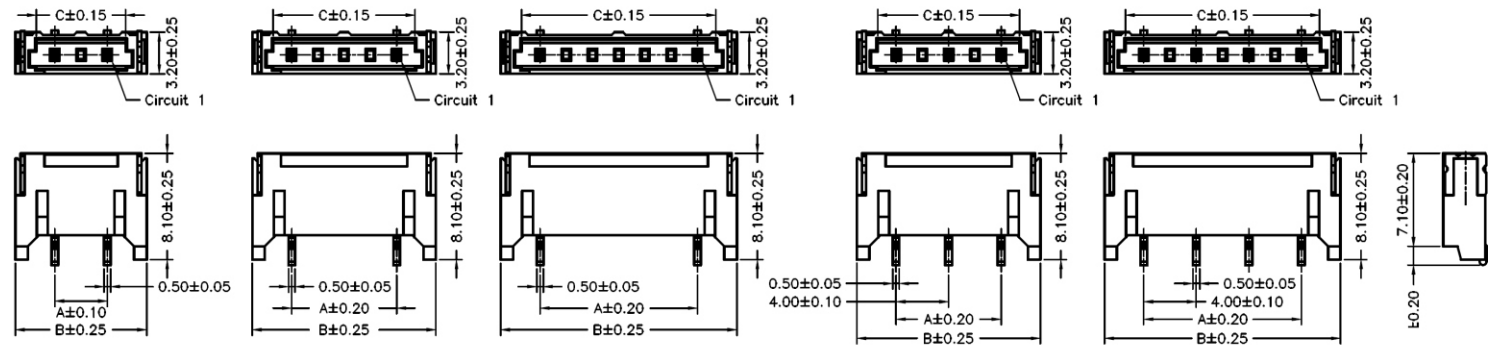


BH-WX-0302

BH-WX-0502

BH-WX-0702

BH-WX-0503

BH-WX-0704

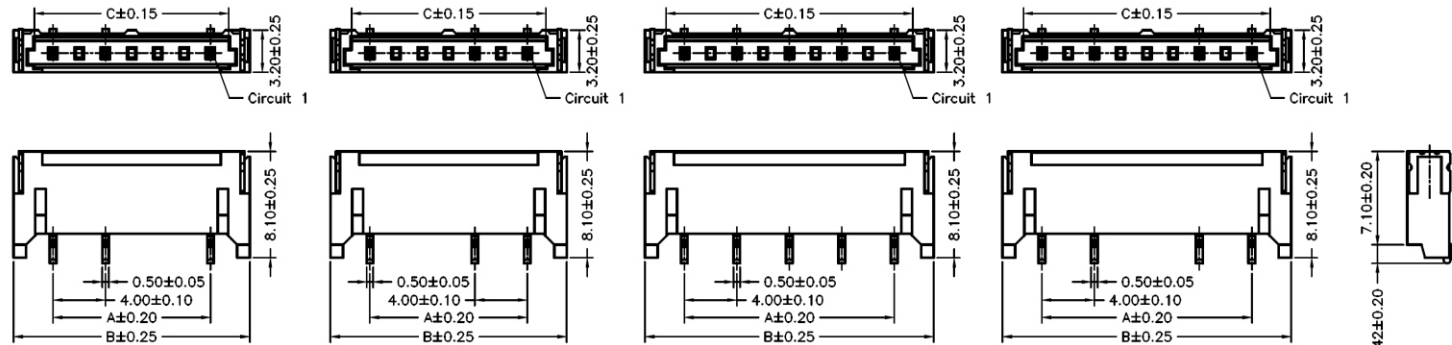

BH-WX-0703EL

BH-WX-0703ER

BH-WX-0905

BH-WX-0904

Ordering Information & Dimensions

PART NO.	Dimensions		
	A	B	C
BH-WX-0302	4.00	10.00	6.80
BH-WX-0502	8.00	14.00	10.80
BH-WX-0702	12.00	18.00	14.80
BH-WX-0503	8.00	14.00	10.80
BH-WX-0704	12.00	18.00	14.80
BH-WX-0703EL	12.00	18.00	14.80
BH-WX-0703ER	12.00	18.00	14.80
BH-WX-0905	16.00	22.00	18.80
BH-WX-0904	16.00	22.00	18.80

RoHS Compliant

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY


CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1


DATE

SIZE A4 PPROJECTION

X, ±  
 X, ±  
 .XX ±  
 .XXX ±  
 ANG ±



ORDER INFORMATION



DESCRIPTION: