

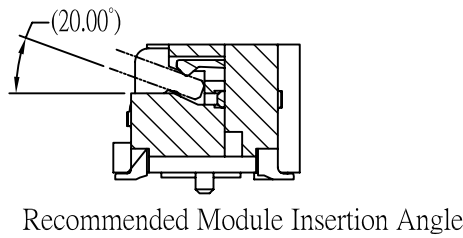



NOTES:
 1.MATERIAL:
 1-1 HOUSING : HIGHT TEMPERATURE THERMOPLASTIC UL94V-0, BLACK
 1-2 CONTACT : COPPER ALLOY
 1-3 SOLDER TAB : COPPER ALLOY
 2.FINISH:
 2-1 CONTACT AREA: GOLD PLATED OVER 40u" MIN. Ni UNDER PLATED OVERALL
 2-2 SOLDERING TAB: TIN PLATING
 3.GENERAL TOLERANCE :±0.3

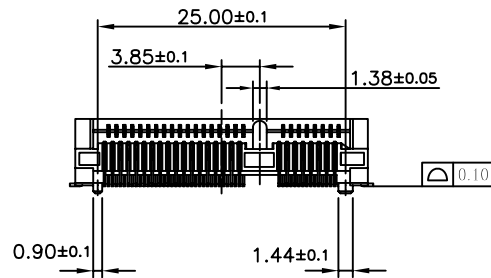

Recommended Module Insertion Angle

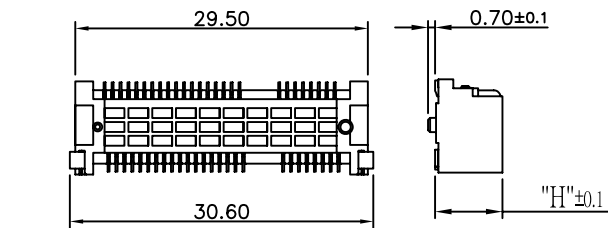

MPCI-Wxx-052-LF
 52:H:5.2mm LEADFREE
 92:H:9.2mm

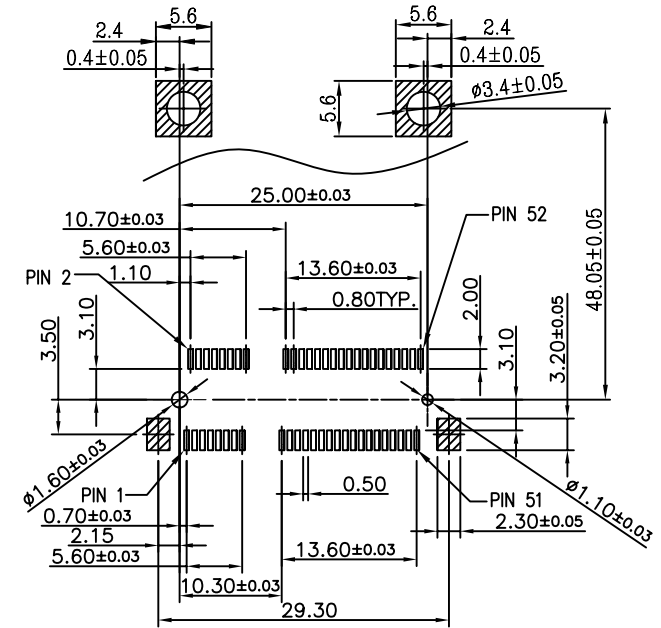

Recommended P.C.Board Layout.
 FOR STAND OFF TYPE

P/N	STAND-OFF (mm)		
	A	B	H
MPCI-W52-052	3.3	2.8	5.2
MPCI-W56-052	3.7	3.2	5.6
MPCI-W68-052	4.9	4.4	6.8
MPCI-W80-052	6.1	5.6	8.0
MPCI-W92-052	7.3	6.8	9.2

RoHS Compliant

MORETHANALL
 CONNECTORS
 ASSEMBLIES

PART NO. MPCI-Wxx-052

DWG NO. MPCI-Wxx-052

FILE NO.

CHECKED BY CY

DRAWING BY

TOLERANCES ARE

.X ± 0.2
 .XX ±
 .XXX ±
 AWG

DESCRIPTION:


MINI PCI EXPRESS
 Pitch0.8mm 52 PIN 5.2~9.2 mm Height

焯倫股份有限公司

UNIT / mm

SCALE 1:1

PROJECTION



AREA

REVISIONS

HK

DATE