
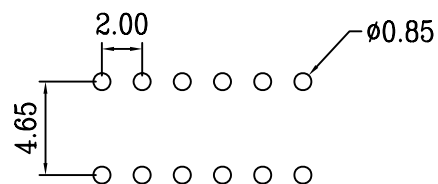


# SPECIFICATIONS

- \* Current Rating : 1 Amps
- \* Insulator resistance: 5000 Megohms min.
- \* Contacts resistance :20 m ohms max.
- \* Dielectric withstanding: AC 500 V
- \* Operating Temperature: -40°-+105°C
- \* Max Processing Temp: 230° for 30 seconds  
(260° for 7 seconds)
- \* Contact Material: Phosphor bronze
- \* Housing: L.C.P. (UL 94 V-0)

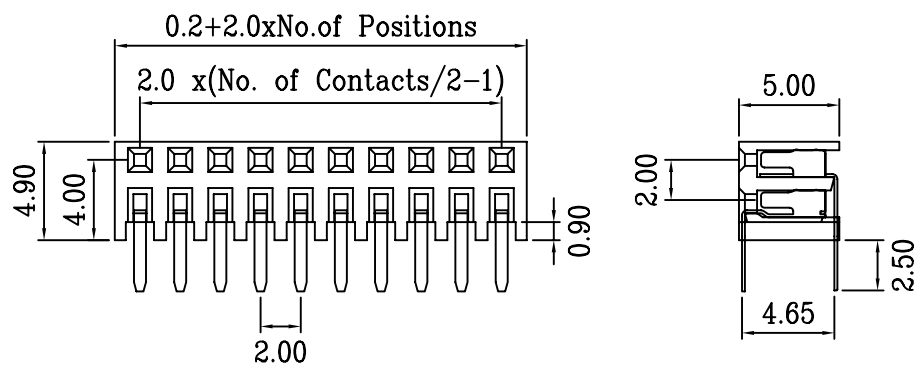

P.C.B.layout

S-S-2Xxx-LF  
LEADFREE  
2X03:6/WAY  
2X50:100/WAY  
RoHS Compliant

**MORETHANALL**  
CONNECTORS  
ASSEMBLIES

PART NO. S-S-2Xxx

DWG NO. S-S-2Xxx

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.2  
.XX ±  
.XXX ±  
AWG

DESCRIPTION:

2.0mm Side Entry Female Socket  
Dual Row SMD type

AREA

REVISIONS

HK

DATE

焜倫股份有限公司