


**Features:**

- 2 ~ 10 circuits available
- Pin Material: Tin-plated phosphor bronze

**Specification:**

- Current rating: 13A (2~4P), 11A (6~10P)
- Voltage rating: 600V
- Dielectric withstanding voltage: 5000V AC/minute
- Ambient temperature rise: -55°C ~ 105°C

UL-SRE-1Xxx-LF  
LEADFREE  
RoHS Compliant

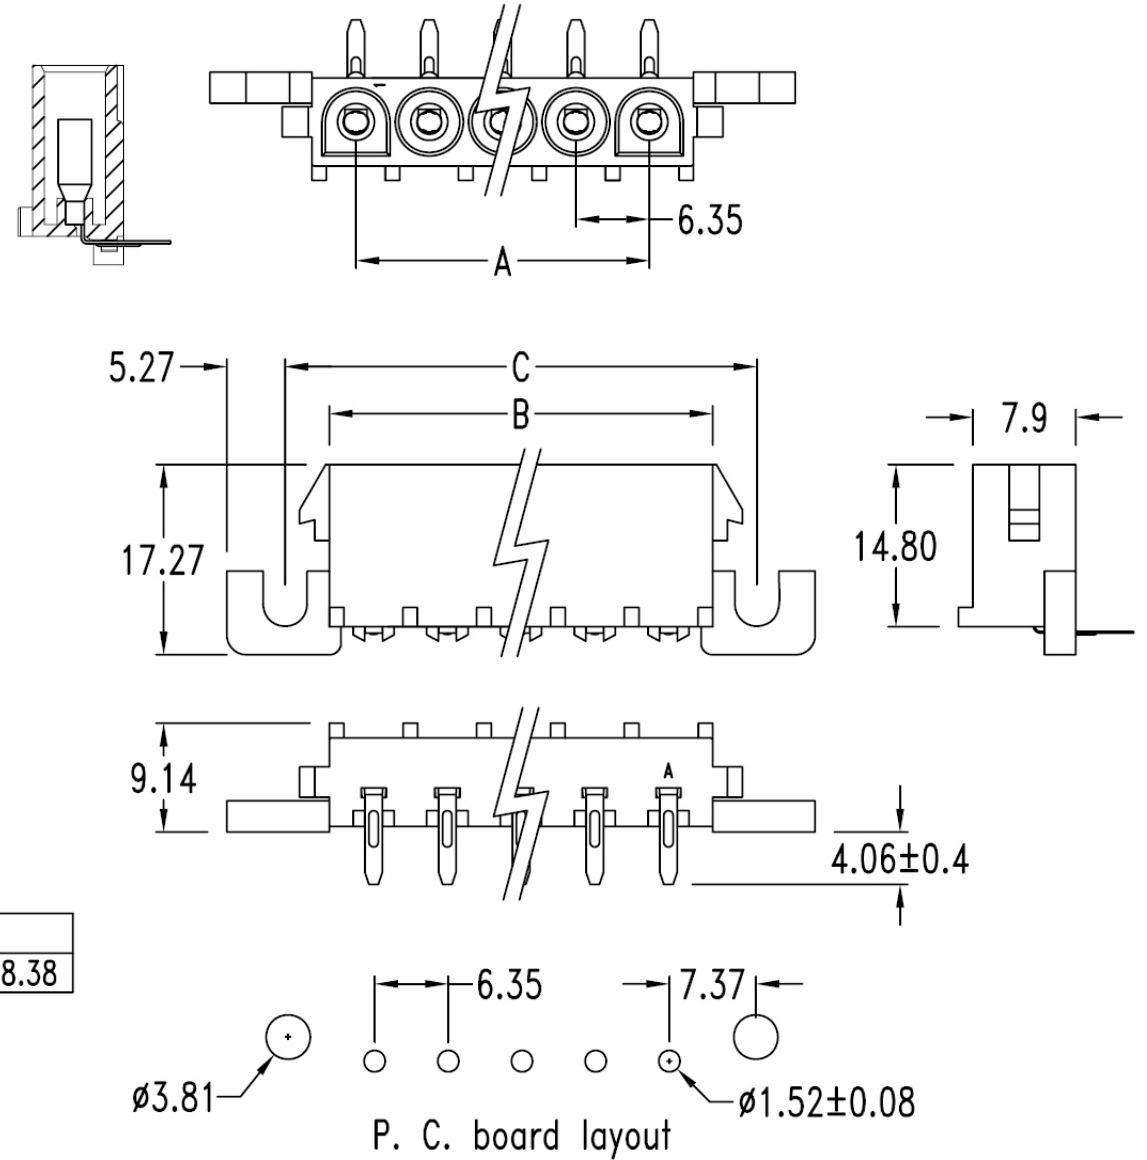

**Dimensional Information ( mm )**

Circuits	Dim. A	Dim. B	Dim. C
N	6.35 x ( N - 1 )	6.35 x N + 1.27	6.35 x N + 8.38

&& N = 2 ~ 10



PART NO. UL-SRE-1Xxx

DWG NO. UL-SRE-1Xxx

CHECKED BY CY

TOLERANCES ARE

.X ± 0.2  
.XX ± 0.1  
.XXX ±  
AWG

DESCRIPTION:

煜倫股份有限公司


FILE NO.

DRAWING BY

UNIT / mm

SCALE 1:1

PROJECTION



AREA

REVISIONS

HK

DATE