

ELECTRICAL CHARACTERISTICS

Contact Current Rating: 1.5 Amperes.
 Dielectric Withstanding Voltage: AC 500V at sea level.
 Insulation Resistance: 1000 Megohms Min.
 Contact Resistance: 30 Milliohms Max.
 Operating Temperature: -55°C to +85°C


MECHANICAL CHARACTERISTICS

Mating Force: 3.5 Kg. Maximum.
 Unmating Force: 1 Kg. Minimum.

MATERIAL

Contacts: Copper Alloy.
 Insulator: Nylon.
 Shell: Copper Alloy.

Re PCB LAYOUT

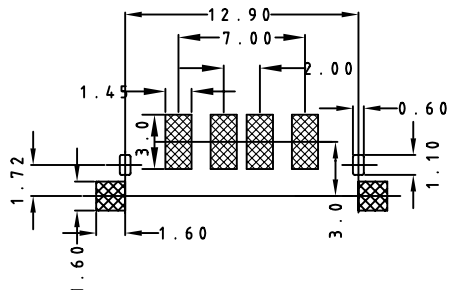

PCB LAYOUT (PCB THICKNESS: 1.60/1.20MM)
 OTHER TOLERANCE: ±0.05

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1:1

DATE

SIZE A4

P PROJECTION

X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±



ORDER INFORMATION

USB-SWFEM17xx-4A-LF
 SERIES | | | | LEADFREE
 FEMALE | | | | 4 PIN A TYPE
 90°SMT | | | | BK:BLACK
 OFFSET | | | | WH:WHITE
 | | | | 1.72mm
 | | | | EAR METAL

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: