
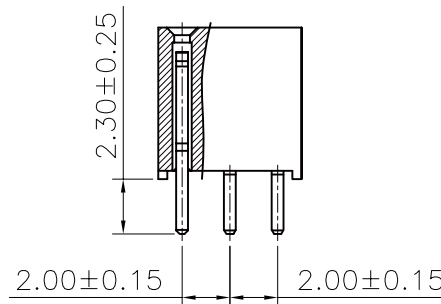


Recommended P.C.Board
Hole Layout

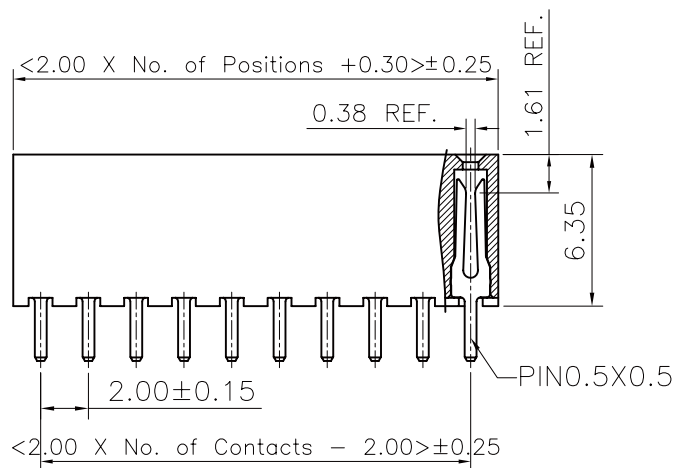

1. Specifications

Current Rating: 2Amp

Insulation Resistance: 1000MΩ Min.

Dielectric Withstanding: 500V AC

Contact Resistance: 20mΩ Max.

Operating Temperature: -40°C to +105°C

2. Materials

Contact Material: Phosphor Bronze

Housing Material: NY6T UL94V-0, Color: Black.

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1


DATE

SIZE A4

TOLERANCES ARE

X, ±
.X, ±
.XX, ±
.XXX, ±
ANG, ±

P PROJECTION



ORDER INFORMATION

S-D63-3Xxx-LF
SERIES | LEADFREE
DIP 180° | 3X03:09WAY
HIGH 6.3mm | 3X40:120WAY

DESCRIPTION: 2.00 FEMALE HEADER TRIPLE ROWS DIP TYPE BASE 6.35H