
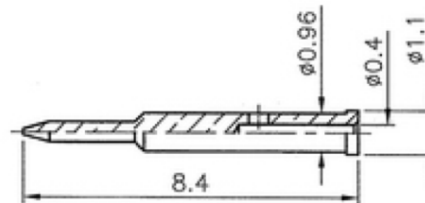


RECOMMENDED
CABLE STRIPPING DIM'S
(建議剝線尺寸)

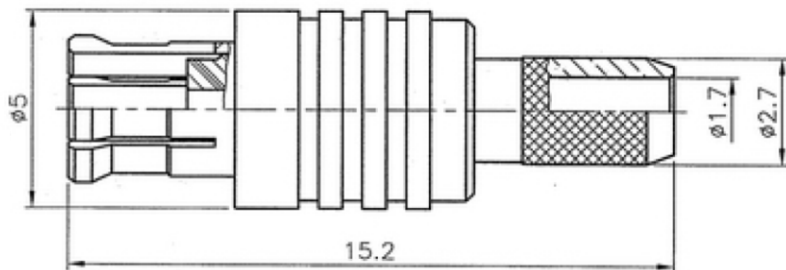

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

1. BRASS PER QQ-B-626
2. GOLD PL 3 MIN OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
3. GOLD PL 30 MIN OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
4. TEFLON MIL-P-19468
5. BERYLLIUM COPPER PER QQ-C-530
6. BRASS JIS H 3250, C 2700
7. GOLD PL FLUSH OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE

1. CRIMPED FERRULE
HEX CRIMP SIZE .128" (3.25mm)
(套管壓管工具)
2. CONTACT PIN TO SOLDER
(中心針銲接)

FERRULE	NOTE 6	NOTE 7	
CONTACT PIN	NOTE 1	NOTE 3	
CONTACT BODY	NOTE 5	NOTE 2	
INSULATOR	NOTE 4	WHITE	
BODY	NOTE 1	NOTE 2	
NO.	DESCRIPTION	MATERIAL	FINISH Q'TY

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS


UNIT / mm SCALE 1:1

DATE

SIZE A4

PJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

MCX-PC-179-LF
SERIES | LEADFREE
RG179
CRIMP
MALE

DESCRIPTION: MCX CRIMP PLUG (75 ohms)
(FOR RG-179/U,187A/U)