



FRONT VIEW

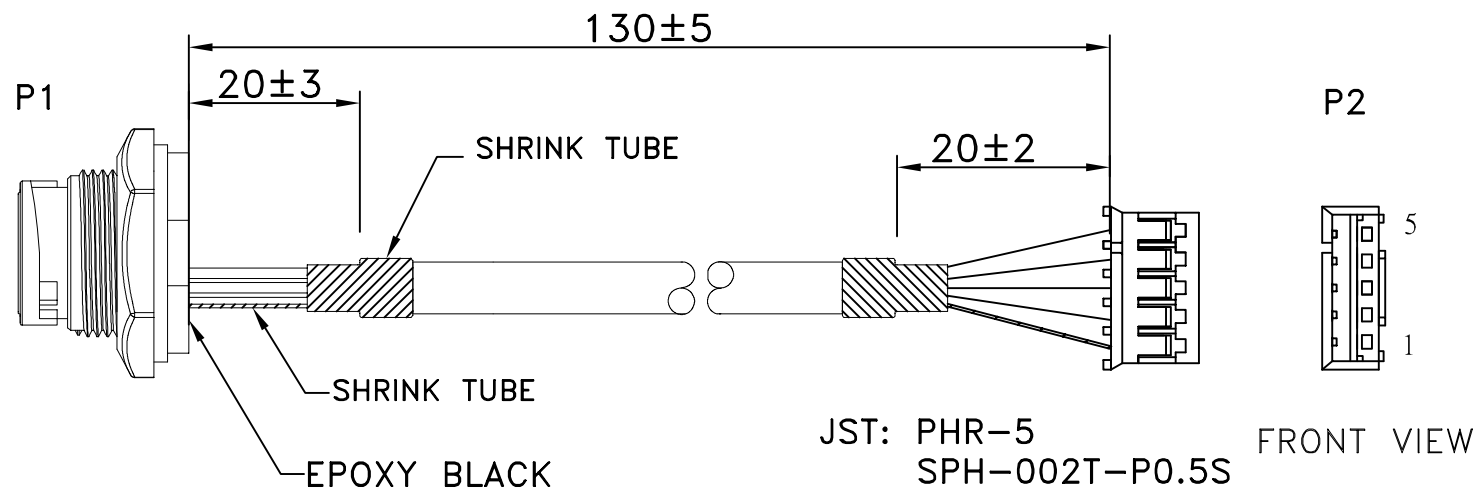

FRONT VIEW

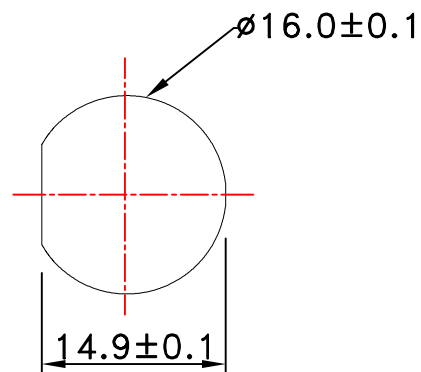

RECOMMEND
PANEL CUT-OUT

PIN OU

P1		P2
1	RED	5
2	WHITE	4
3	GREEN	3
5	BLACK	2
SHELL	DRAIN	1

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION



ORDER INFORMATION

PHWPMIB-055AB28JT-F13C

SERIES

130mm

FEMALE TO FEMALE

JST

28 AWH

05 TO 05AB TYPE

DESCRIPTION: MICRO-USB (A&B) FEMALE TO PH-H-05

***CONSTRUCTION:

1.WIRE:

* UL2725 (1P/28#)+(2C/28#)+AEB65% OD:3.5mm BLACK JACKET.

***CONNECTORS:

2.MICRO USB AB:

- * MICRO-USB (A&B) FEMALE TYPE SOLD.
- * PINS: PHOSPHOR BRONZE WITH GOLD PLATED
- * INSULATOR: THERMOPLASTIC COLOR:BLACK.
- * SHELL: STEEL WITH NICKETL PLATED.
- * HEX NUT: THERMOPLASTIC COLOR:BLACK
- * GASKET: SILICONE COLOR:BLACK
- * PCB: FR-4
- * GLUE: EPOXY COLOR:BLACK

3.HOUSING:

* PITCH 2.0MM 5PIN HOUSING, JST:PHR-5 WHITE NYLON66 UL94V-0 RATED.

4.TERMINAL:

* JST: SPH-002T-P0.5S PHOSPHOR BRONZE TIN PLATED.

5.TUBE:

* SHRINK TUBE BLACK \varnothing 4.0mm \varnothing 0.8mm.

6.TEST:

* CT: 2 Ohm. IS: 5M Ohm.

7.PACKING:

* PACK EACH CABLE IN A POLY BAG.

8.MATERIAL:

* MATERIAL WITH RoHS GRADE.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION 

X. \pm
.X \pm
.XX \pm
.XXX \pm
ANG \pm



ORDER INFORMATION

PHWPMIB-055AB28JT-F13C

SERIES

130mm

FEMALE TO FEMALE

JST
28 AWH
05 TO 05AB TYPE

DESCRIPTION: MICRO-USB (A&B) FEMALE TO PH-H-05