
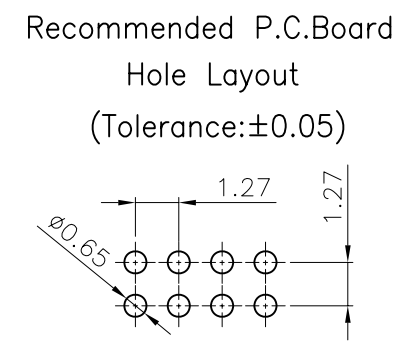
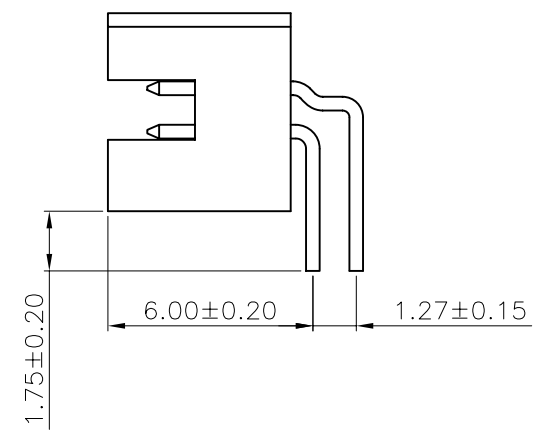


Specifications  
 Current Rating: 1Amp  
 Insulation Resistance: 1000MΩ Min.  
 Dielectric Withstanding: 300V AC  
 Contact Resistance: 20mΩ Max.  
 Operating Temperature: -40°C to +105°C

Materials  
 Contact Material: Phosphor Bronze  
 Insulation Material: Polyester, UL 94V-0  
 Nylon 6T(Processing temp.260°C,10sec)  
 All materials must be GP materials

PAB-R-2Xxx-LF  
 LEADFREE  
 No. of Pins per Row  
 05,08,10,15,20,22,24,30

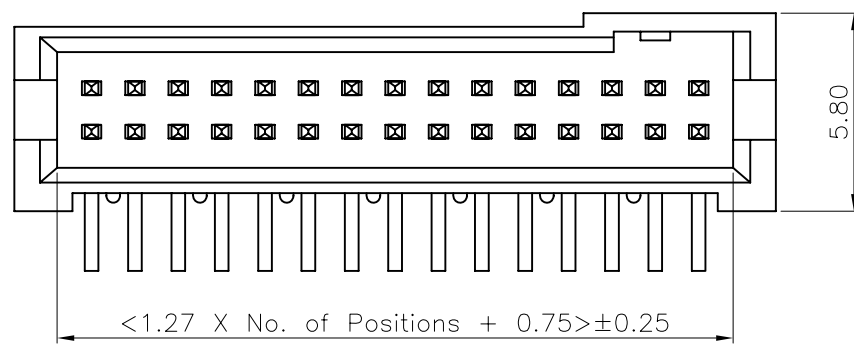

RoHS Compliant



PART NO. PAB-R-2Xxx		CHECKED BY CY		TOLERANCES ARE .X ± 0.2 .XX ± .XXX ± AWG	DESCRIPTION: 1.27 BOX HEADER DUAL ROWS R/A TYPE	AREA	REVISIONS	HK	DATE
DWG NO. PAB-R-2Xxx		DRAWING BY							
FILE NO.		PROJECTION							
UNIT / mm	SCALE 1:1								

焯倫股份有限公司