

1 2 3 4 5 6 7 8 9 0

J

I

H

G

F

E

D

C

B




A

Specifications

Current Rating: 2Amp  
 Insulation Resistance: 1000MΩ Min.  
 Dielectric Withstanding: 500V AC/DC  
 Contact Resistance: 20mΩ Max.  
 Operating Temperature: -40°C to +105°C

Materials


Contact Material: Phosphor Bronze  
 Insulation Material: Polyester, UL 94V-0  
 Nylon-6T

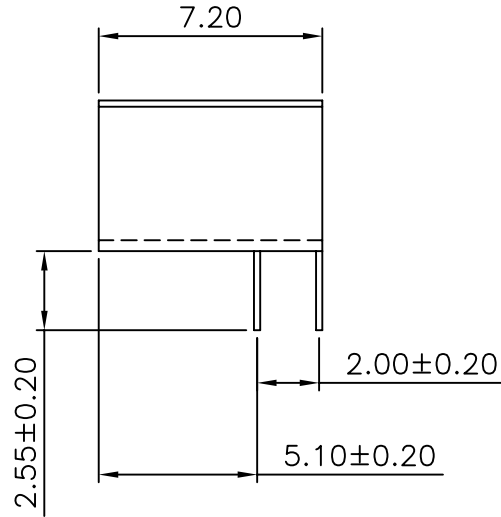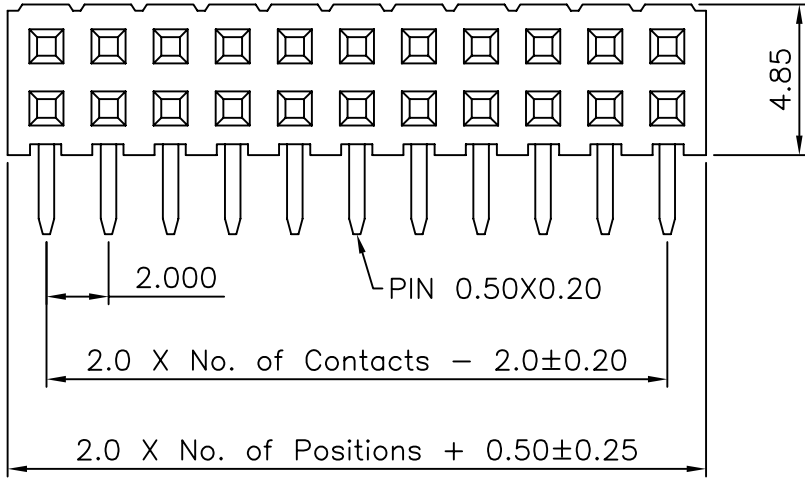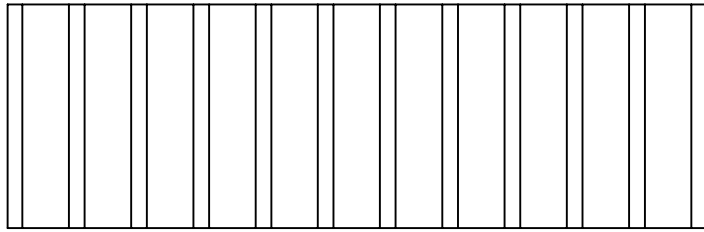

S-R72-2Xxx-LF  
 LEADFREE

RoHS Compliant

Recommended P.C.Board  
 Hole Layout

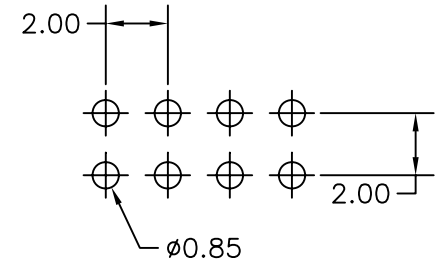

PART NO. S-R72-2Xxx

DWG NO. S-R72-2Xxx

CHECKED BY CY

TOLERANCES ARE

DESCRIPTION: 2.0 FEMALE HEADER DUAL ROWS R/A TYPE SIDE ENTRY

FILE NO.

DRAWING BY

.X ± 0.38  
 .XX ± 0.25  
 .XXX ± 0.13  
 AWG

AREA REVISIONS HK DATE

煜倫股份有限公司

UNIT / mm

SCALE 1:1

PROJECTION