

Specifications

Current Rating: 1Amp

Insulation Resistance: 1000MΩ Min.

Dielectric Withstanding: 300V AC/DC

Contact Resistance: 20mΩ Max.

Operating Temperature: -40°C to +105°C


Materials

Contact Material: Phosphor Bronze

Insulation Material: Polyester, UL 94V-0

Nylon 6T

Recommended P.C.Board Hole Layout

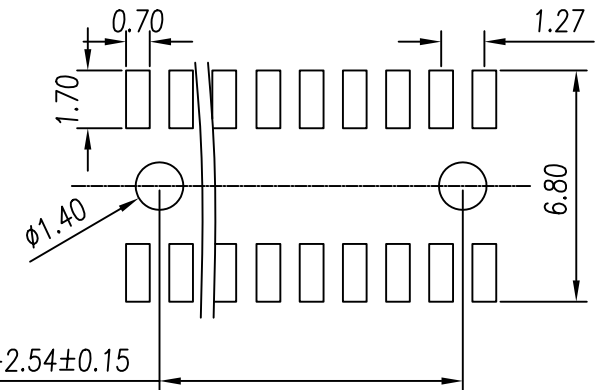

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. Y-V60P-2Xxx

DWG NO. Y-V60P-2Xxx

FILE NO.


UNIT / mm

SCALE 1:1

APPROVED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ±0.38

.XX ±0.25

.XXX ±0.13

AWG

DESCRIPTION:

1.27 FEMALE HEADER DUAL ROWS SMT TYPE H:6.0

AREA

REVISIONS

HK

DATE

焯倫有限公司