


尺寸代號圖

### 線材加工圖

加工項目:

1.線外加工:第1/30雙重PIN倒折貼入鋁箔麥拉下層

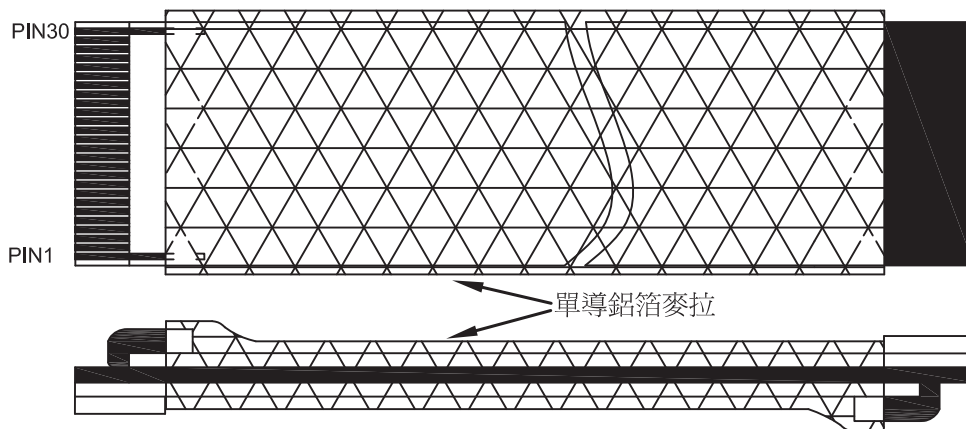

No. of Conductor		30									
SYMBOL	P	W	SP	M	A	TL	T	S1	S2	S3	S4
RANGE	0.5	15.5	14.5	0.5	0	200	0.3	4	4	6	6
TOLERANCE	±0.05	±0.1	±0.1	±0.1	±0.5	±2	±0.05	±1	±1	±2	±2
CONDUCTOR		Tin Plated Copper		Thickness(Ct)		0.05		±0.01			
SPECIFICATION		Wire (Tin 1~3um)		Width(Cw)		0.32		±0.03			

Note:

UL Style: 20624 80°C 60V

ROSH: YES

Operating Temperature: -30°C~85°C

Dielectric Strength: AC500V / 10ma / 1 min

Rated Current: 1A

儲存環境: 16°C~27°C / 濕度 65RH%

Material:

Insulation Film:

Polyester White

Supporting Tape:

Polyester Blue

Conductor:

Tin Plated Flat Copper Wire

EMI對策:

鋁箔麥拉+導電膠

單導鋁箔麥拉結構表示圖



FPV-CT30-200-LF  
LEADFREE  
RoHS Compliant

**MORETHANALL**  
CONNECTORS  
ASSEMBLIES

PART NO. FPV-CT30-200

DWG NO. FPV-CT30-200

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

.X ± 0.2  
.XX ±  
.XXX ±  
AWG

DESCRIPTION:

0.5PH 30PIN L=200mm D TYPE +鋁箔+2接地

AREA

REVISIONS

HK

DATE

焯倫股份有限公司