


- \* Poles: 2-24
- \* Material: Polyester, UL94V-0

**Specifications**

- \* Current rating: 3A AC, DC
- \* Voltage rating: 250V AC, DC
- \* Temperature range: -25°C~+85°C
- \* Insulation resistance: 1,000MΩ min.
- \* Withstand voltage: 1,500V AC/minute

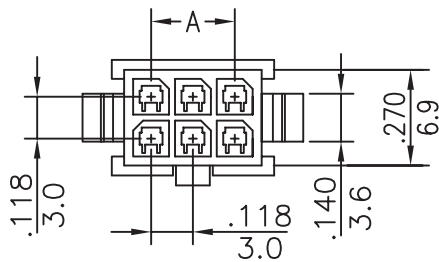

CIRCUITS	PART NO.	DIMENSION in.(mm)			
		A	B	C	D
2	MIF-PH-2X01		0.150(3.8)	0.165(4.2)	0.311(7.9)
4	MIF-PH-2X02	0.118(3.0)	0.268(6.8)	0.283(7.2)	0.429(10.9)
6	MIF-PH-2X03	0.236(6.0)	0.386(9.8)	0.402(10.2)	0.547(13.9)
8	MIF-PH-2X04	0.354(9.0)	0.504(12.8)	0.520(13.2)	0.666(16.9)
10	MIF-PH-2X05	0.472(12.0)	0.622(15.8)	0.638(16.2)	0.784(19.9)
12	MIF-PH-2X06	0.591(15.0)	0.740(18.8)	0.756(19.2)	0.902(22.9)
14	MIF-PH-2X07	0.709(18.0)	0.858(21.8)	0.874(22.2)	1.020(25.9)
16	MIF-PH-2X08	0.827(21.0)	0.976(24.8)	0.992(25.2)	1.138(28.9)
18	MIF-PH-2X09	0.945(24.0)	1.094(27.8)	1.110(28.2)	1.256(31.9)
20	MIF-PH-2X10	1.063(27.0)	1.213(30.8)	1.228(31.2)	1.374(34.9)
22	MIF-PH-2X11	1.181(30.0)	1.331(33.8)	1.346(34.2)	1.492(37.9)
24	MIF-PH-2X12	1.299(33.0)	1.449(36.8)	1.464(37.2)	1.610(40.9)

RoHS Compliant

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT/mm SCALE 1:1


DATE

SIZE A4


TOLERANCES ARE

X.±  
.X±  
.XX±  
.XXX±  
ANG±

PJECTION



ORDER INFORMATION

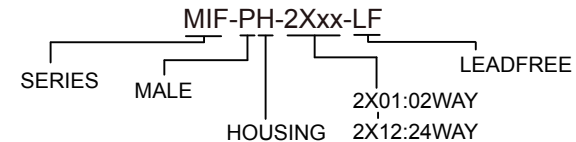

DESCRIPTION: 3.0mm MICKO FIT HOUSINGS