
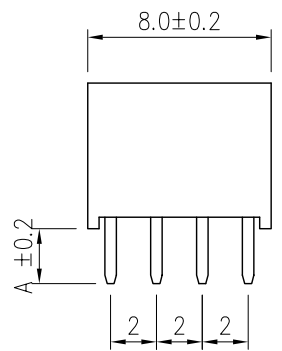


**Recommended
P.C. Board Layout**

Specifications

- Current Rating : 2 Amps
- Insulator Resistance : 1000 Megohms min.
- Contact Resistance : 20 m ohms max.
- Dielectric Withstanding : AC 500V
- Operating Temperature : -40°C ~ +105°C
- Contact Material : Phosphor Bronze
- Insulator Material : Polyester, UL 94V-0
- Standard : Nylon-6T
- Contact Plated : See Option / Standard: Full Gold

**S-D63-4Xxx-LF
LEADFREE**

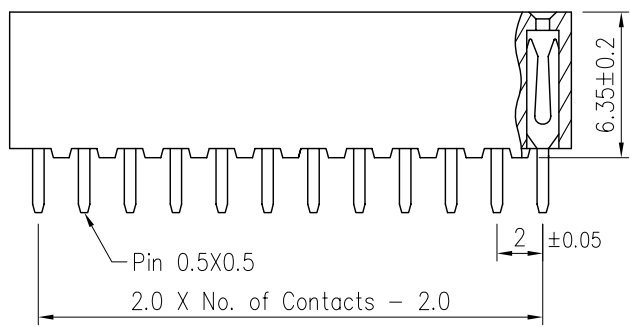

PART NO. S-D63-4Xxx

DWG NO. S-D63-4Xxx

CHECKED BY CY

TOLERANCES ARE

DESCRIP TION:

Female Header Pitch 2.0mm
Profile : 6.35mm, 4 RowS, Straight Type

煜倫股份有限公司

FILE NO.

DRAWING BY

.X ± 0.2
.XX ± 0.1

AREA

REVISIONS

HK

DATE

UNIT / mm

SCALE 1:1

PROJECTION

.XXX ±
AWG