

MATERIALS:




- HOUSING-DSM STANYL TE250F6 (NYLON-46)
BLACK COLOR, UL94V-0
- OR-NYLON ZYTEL FR-52
BLACK COLOR, UL94V-0

TERMINAL-0.35mm THICK PHOS-BRONZE PLATED
WITH HARD GOLD AND TIN/LEAD
IN SOLDER AREA.

HOLD DOWN-0.35mm THICK COPPER ALLOY,
PLATED WITH TIN-LEAD.

CAVITY CONFIRMS TO FCC RULES AND REGULATIONS
PART 68,SUBPART F.

COPLANARITY:
THE MAXIMUM DISTANCE
BETWEEN LOWEST AND
HIGHEST PIN WHEN
HOUSING RESTS
ON A FLAT SURFACE

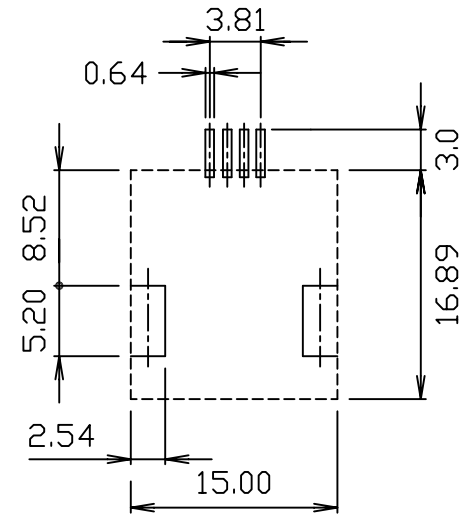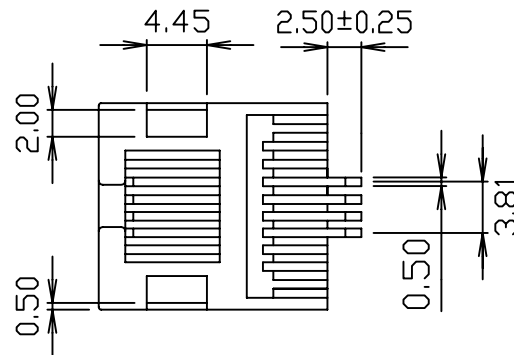

MJW11-KX06N-1004-LF
LEADFREE

RoHS Compliant

PCB LAYOUT



PART NO. MJW11-KX06N-1004

DWG NO. MJW11-KX06N-1004

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.25

.XX ± 0.13

.XXX ±

AWG

DESCRIPTION:

10POS. 8 CONTACTS, SOLDER TAB-INSIDE
LOW PROFILE 1 PORT, SIDE ENTRY SMT TYPE

AREA

REVISIONS

HK

DATE

焯倫股份有限公司