

POSITION	A	B
06P	8.01	2.54
08P	9.28	3.81
10P	10.55	5.08
12P	11.82	6.35
14P	13.09	7.62
16P	14.36	8.89
20P	16.90	11.43
22P	18.17	12.70
26P	20.71	15.24
30P	23.25	17.78
34P	25.79	20.32
40P	29.60	24.13
44P	32.14	26.67
50P	35.95	30.48
60P	42.30	36.83
68P	47.38	41.91
80P	55.00	49.53

SPECIFICATIONS

Material

Insulator : PBT glass reinforced, rated UL 94V-0

Contact : Phosphor Bronze or Brass

Electrical

Current Rating : 0.5Amp



Contact Resistance : 30 m ohms max.

Insulation Resistance : 1000 M ohms min.

Dielectric Withstanding Voltage : 250V AC for 1minute

Operating Temperature : -40° ~ +105°

► Flat ribbon cable with 0.635mm pitch.

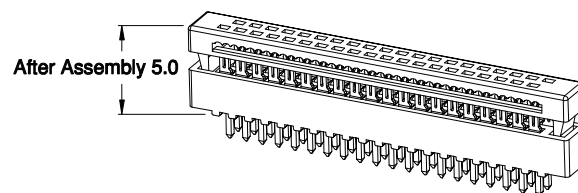

P.C.B. LAYOUT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

HAP-C2-xxx-LF

SERIES

006~080WAY

LEADFREE

TWO TYPE

DESCRIPTION: