


COPLANARITY SPECIFICATION:
 WITH THE MODULAR JACK SITTING
 ON A LEVEL SURFACE.
 THE MAXIMUM GAP BETWEEN
 THE LEVEL SURFACE AND ALL
 TERMINAL TAILS AND BOTH FITTING
 NAILS IS 0.10m/m

MATERIAL:

- HOUSING-PA9T GN2330
HEAT RESISTANT PLOYAMIDE RESIN
BLACK COLOR, UL94V-0
- CONTACTS-0.35mm THICK PHOS-BRONZE
PLATED WITH HARD GOLD AND
GOLD FLASH IN SOLDER AREA.
- HOLD DOWN-0.30mm PHOS-BRONZE,
PLATED WITH TIN.

CAVITY CONFIRMS TO FCC RULES AND REGULATIONS
 PART 68,SUBPART F.

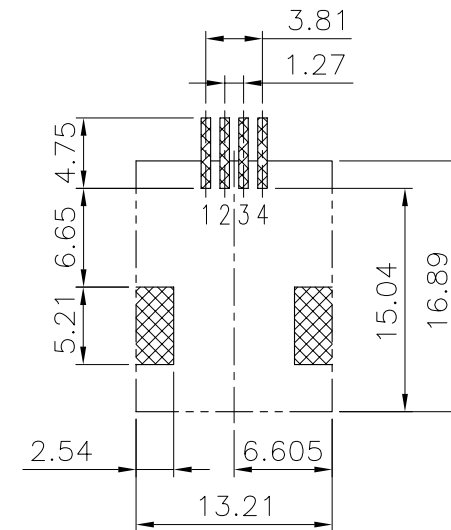

PCB LAYOUT

Ref.

MJW11-KX06N-0604-LF
 LEADFREE

RoHS Compliant



PART NO. MJW11-KX06N-0604

DWG NO. MJW11-KX06N-0604

CHECKED BY CY

TOLERANCES ARE

DESCRIP TION:

RJ11, SMT TYPE, SHIELDLESS
 SIDE ENTRY PCB JACK

FILE NO.

DRAWING BY

.X ± 0.2
 .XX ±
 .XXX ±
 AWG

AREA

REVISIONS

HK

DATE

煜倫股份有限公司

UNIT / mm

SCALE 1:1

PROJECTION

